

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 379 090 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
07.01.2004 Bulletin 2004/02

(51) Int Cl.7: H04N 7/26

(21) Application number: 03013967.9

(22) Date of filing: 20.06.2003

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

- Li, Shipeng
Irvine, CA 92618 (US)
- Wu, Feng
Beijing 100080 (CN)
- Sullivan, Gary J.
Redmond, WA 98052 (US)

(30) Priority: 05.07.2002 US 393894 P

(71) Applicant: MICROSOFT CORPORATION
Redmond, Washington 98052-6399 (US)


(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(72) Inventors:
• Tourapis, Alexandros
West Windsor, NJ 08550 (US)

(54) Improved optimization techniques for data compression

(57) Methods and apparatuses are provided relating to the encoding of data, such as, e.g., images, video, etc. For example, certain methods include processing at least a portion of data using a plurality of different quantization functions to produce a plurality of corresponding quantized portions of data, and selectively outputting one of the quantized portions of data based on at least one threshold value. The method may also include dividing initial data into a plurality of portions and

classifying the portion of data based on at least one classification characteristic. Here, for example, there may be a threshold value that is associated with the classification characteristic. Additional syntax may be adopted to enable considerably higher compression efficiency by allowing several alternative motion prediction cases. A high efficiency time stamp independent Direct Mode is also provided which considers spatial motion vector prediction as well with stationary temporal predictors.

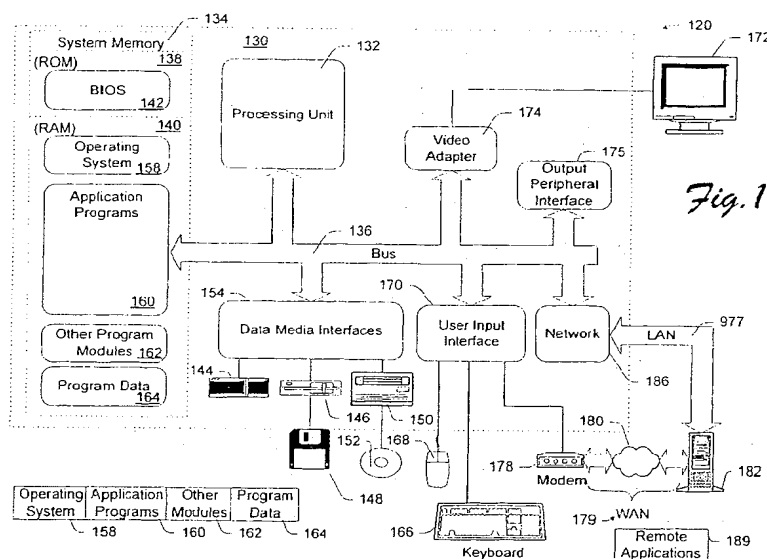

Description**RELATED PATENT APPLICATIONS**

5 [0001] This U.S. Patent Application claims the benefit of priority from, and hereby incorporates by reference the entire disclosure of, co-pending U.S. Provisional Patent Application Serial No. 60/393,894, filed July 5, 2002, and titled "Rate/Distortion Optimization Techniques for Image and Video Compression".

TECHNICAL FIELD

10 [0002] The present invention relates generally to computers and like devices, and more particularly to methods, apparatuses and systems for compressing/encoding data and decompressing/decoding data.

BACKGROUND

15 [0003] There is a continuing need for improved methods and apparatuses for compressing/encoding data and decompressing/decoding data, and in particular image and video data. Improvements in coding efficiency allow for more information to be processed, transmitted and/or stored more easily by computers and other like devices. With the increasing popularity of the Internet and other like computer networks, and wireless communication systems, there is a desire to provide highly efficient coding techniques to make full use of available resources.

20 [0004] Rate Distortion Optimization (RDO) techniques are quite popular in video and image encoding/decoding systems since they can considerably improve encoding efficiency compared to more conventional encoding methods.

[0005] Additional information, for example, may be found in a Master of Science in Computer Science and Engineering thesis titled "A Locally Adaptive Perceptual Masking Threshold Model for Image Coding", by Trac Duy Tran while at the Massachusetts Institute of Technology, May 1994.

25 [0006] As there is a continuing desire to provide even more encoding efficiency, there is a need for improved methods and apparatuses that further increase the performance of RDO or other like techniques to achieve improved coding efficiency versus existing systems.

SUMMARY

30 [0007] The present invention provides improved methods and apparatuses that can be used in compressing/encoding, decompressing/decoding data, and/or otherwise processing various forms of data including, but not limited to image, video and/or audio data.

35 [0008] The above-stated needs and others are met, for example, by a method that includes processing at least a portion of data using a plurality of different quantization functions to produce a plurality of corresponding quantized portions of data, and selectively outputting one of the quantized portions of data based on at least one threshold value. The method may also include dividing initial data into a plurality of portions and classifying the portion of data based on at least one classification characteristic. Here, for example, there may be a threshold value that is associated with the classification characteristic.

40 [0009] By way of example, the initial data may include image data, video data, audio data, speech data, and the like. The portion that is selected may take the form of a block, a macroblock, a slit, a slice, a section, or the like. The classification characteristic(s) may include an edge characteristic, a texture characteristic, a smoothness characteristic, a luminance characteristic, a chrominance characteristic, a color characteristic, a noise characteristic, an object characteristic, a motion characteristic, a user preference characteristic, a user interface focus characteristic, a layering characteristic, a timing characteristic, a volume characteristic, a frequency characteristic, a pitch characteristic, a tone characteristic, a quality characteristic, a bit rate characteristic, a data type characteristic, a resolution characteristic, an encryption characteristic, or the like.

45 [0010] In certain exemplary implementations, the plurality of different quantization functions includes at least two operatively different Deadzone Quantizers. Here, for example, a Deadzone Quantizer may be an adaptive coverage Deadzone Quantizer, a variable coverage size Deadzone Quantizer, or the like. The method may also include encoding the quantized portions. The method may further include performing Rate Distortion Optimization (RDO) to select the quantized portions of data.

50 [0011] In accordance with still other exemplary implementations, another method includes performing at least one characteristic analysis on at least one portion of image data, selectively setting at least one adaptive quantization parameter within an encoder based on the characteristic analysis, and encoding the portion of image data with the encoder.

55 [0012] In yet another exemplary implementation, a method is provided that includes causing at least one portion of

image data to be encoded using at least two different Deadzone Quantizers, and identifying preferred encoded data in an output of one of the at least two different Deadzone Quantizers based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

[0013] The above stated needs and others are also satisfied by a method that includes causing at least one portion of image data to be encoded using a first Deadzone Quantizer, determining if an output of the first Deadzone Quantizer satisfies at least one decision factor and if so, then outputting the output of the first Deadzone Quantizer. If not, then causing the portion of image data to be encoded using at least a second Deadzone Quantizer that is different from the first Deadzone Quantizer. Here, for example, the method may also include identifying an acceptable encoded version of the portion of the image data based on an RDO decision or other like.

[0014] In still another exemplary implementation, a method includes performing image analysis on at least one portion of image data, performing block classification on the analyzed portion of image data, performing Deadzone Quantization of the block classified portion of image data, and performing encoding of the Deadzone Quantized portion of image data. Here, for example, the image analysis may include edge detection analysis, texture analysis, etc.

[0015] In accordance with a further exemplary implementation a method is provided that includes causing at least one portion of video image data to be encoded using at least two different encoders wherein at least one of the two different encoders includes a Deadzone Quantizer operatively configured to support a Non Residual Mode of the video image data, and identifying preferred encoded frame data in an output of one of the two different encoders based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

[0016] Another exemplary method includes selectively varying at least one Lagrangian multiplier that is operatively configuring encoding logic having a quantizing function based on at least one characteristic of at least one portion of image data, and encoding the portion of the image data using the encoding logic.

[0017] In still another implementation, an exemplary method includes encoding at least a portion of video image data using encoder logic, and causing the encoder logic to output syntax information identifying a type of motion vector prediction employed by the encoder logic.

[0018] A method for use in conveying video encoding related information includes encoding video data, and selectively setting at least one descriptor within a syntax portion of the encoded video data, the descriptor identifying an adaptive spatial/spatio-temporal encoding associated with at least one B frame encoded with the video data. Another method for use in conveying video encoding related information includes encoding video data, and selectively setting at least one descriptor within a syntax portion of the encoded video data, the descriptor identifying an adaptive copy/motion-copy skip mode in at least one inter frame encoded with the video data.

[0019] An exemplary method for use in a time stamp independent mode encoding of video considering stationary temporal/spatial portions of video frames is provided. Here, for example, the method includes selectively applying spatial prediction of motion associated with at least one portion of a video frame in a video sequence, and, if temporal motion prediction information for a reference portion of another video frame is zero, then setting the spatial prediction of motion to zero.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] A more complete understanding of the various methods, apparatuses and systems of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

Fig. 1 is a block diagram that depicts an exemplary device, in the form of a computer, which is suitable for use with certain implementations of the present invention.

Figs 2(a-d) are graphs depicting exemplary selectable Deadzone Quantizers, in accordance with certain implementations of the present invention.

Fig. 3 is a flow diagram illustrating an exemplary method for selectively applying different quantization processes to data, in accordance with certain implementations of the present invention.

Fig. 4 is a block diagram depicting exemplary logic for selectively applying different quantization processes to data, in accordance with certain implementations of the present invention.

Fig. 5 is a block diagram depicting exemplary logic for selectively applying different quantization processes to data, in accordance with certain further implementations of the present invention.

Figs 6(a-b) are block diagrams depicting exemplary logic for selectively applying different quantization processes to data, in accordance with still other implementations of the present invention.

Fig. 7 is a block diagram illustratively depicting exemplary logic for selectively applying different quantization processes to image data, in accordance with certain implementations of the present invention.

Fig. 8 is a chart listing exemplary syntax information for use with logic for selectively applying different prediction methods for motion vector, in accordance with certain implementations of the present invention.

Fig. 9 is a block diagram depicting exemplary logic for selectively applying different encoding schemes to video data, in accordance with certain implementations of the present invention.

Fig. 10 is a block diagram depicting exemplary logic for selectively applying different encoding schemes to video data, in accordance with certain further implementations of the present invention.

Fig. 11 is an illustrative diagram certain features of a video sequence employing selectively applied encoding schemes, in accordance with certain implementations of the present invention.

Fig. 12 is a flow diagram depicting an exemplary method for SpatioTemporal Prediction for Direct Mode video sequences, in accordance with certain implementations of the present invention.

DESCRIPTION

[0021] Turning to the drawings, wherein like reference numerals refer to like elements, the invention is illustrated as being implemented in a suitable computing environment. Although not required, the invention will be described in the general context of computer-executable instructions, such as program modules, being executed by a server computer, which may take the form of a personal computer, a workstation, a dedicated server, a plurality of processors, a main-frame computer, etc. Generally, program modules include routines, programs, objects, components, data structures, etc. that perform particular tasks or implement particular abstract data types. The invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

Exemplary Computing Environment:

[0022] Fig. 1 illustrates an example of a suitable computing environment 120 on which the subsequently described methods and arrangements may be implemented.

[0023] Exemplary computing environment 120 is only one example of a suitable computing environment and is not intended to suggest any limitation as to the scope of use or functionality of the improved methods and arrangements described herein. Neither should computing environment 120 be interpreted as having any dependency or requirement relating to any one or combination of components illustrated in computing environment 120.

[0024] The improved methods and arrangements herein are operational with numerous other general purpose or special purpose computing system environments or configurations.

[0025] As shown in Fig. 1, computing environment 120 includes a general-purpose computing device in the form of a computer 130. The components of computer 130 may include one or more processors or processing units 132, a system memory 134, and a bus 136 that couples various system components including system memory 134 to processor 132.

[0026] Bus 136 represents one or more of any of several types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. By way of example, and not limitation, such architectures include Industry Standard Architecture (ISA) bus, Micro Channel Architecture (MCA) bus, Enhanced ISA (EISA) bus, Video Electronics Standards Association (VESA) local bus, and Peripheral Component Interconnects (PCI) bus also known as Mezzanine bus.

[0027] Computer 130 typically includes a variety of computer readable media. Such media may be any available media that is accessible by computer 130, and it includes both volatile and non-volatile media, removable and non-removable media.

[0028] In Fig. 1, system memory 134 includes computer readable media in the form of volatile memory, such as random access memory (RAM) 140, and/or non-volatile memory, such as read only memory (ROM) 138. A basic input/output system (BIOS) 142, containing the basic routines that help to transfer information between elements within computer 130, such as during start-up, is stored in ROM 138. RAM 140 typically contains data and/or program modules that are immediately accessible to and/or presently being operated on by processor 132.

[0029] Computer 130 may further include other removable/non-removable, volatile/non-volatile computer storage media. For example, Fig. 1 illustrates a hard disk drive 144 for reading from and writing to a non-removable, non-volatile magnetic media (not shown and typically called a "hard drive"), a magnetic disk drive 146 for reading from and writing to a removable, non-volatile magnetic disk 148 (e.g., a "floppy disk"), and an optical disk drive 150 for reading from or writing to a removable, non-volatile optical disk 152 such as a CD-ROM, CD-R, CD-RW, DVD-ROM, DVD-RAM or other optical media. Hard disk drive 144, magnetic disk drive 146 and optical disk drive 150 are each connected to bus 136 by one or more interfaces 154.

[0030] The drives and associated computer-readable media provide nonvolatile storage of computer readable instructions, data structures, program modules, and other data for computer 130. Although the exemplary environment described herein employs a hard disk, a removable magnetic disk 148 and a removable optical disk 152, it should be

appreciated by those skilled in the art that other types of computer readable media which can store data that is accessible by a computer, such as magnetic cassettes, flash memory cards, digital video disks, random access memories (RAMs), read only memories (ROM), and the like, may also be used in the exemplary operating environment.

[0031] A number of program modules may be stored on the hard disk, magnetic disk 148, optical disk 152, ROM 138, or RAM 140, including, e.g., an operating system 158, one or more application programs 160, other program modules 162, and program data 164.

[0032] The improved methods and arrangements described herein may be implemented within operating system 158, one or more application programs 160, other program modules 162, and/or program data 164.

[0033] A user may provide commands and information into computer 130 through input devices such as keyboard 166 and pointing device 168 (such as a "mouse"). Other input devices (not shown) may include a microphone, joystick, game pad, satellite dish, serial port, scanner, camera, etc. These and other input devices are connected to the processing unit 132 through a user input interface 170 that is coupled to bus 136, but may be connected by other interface and bus structures, such as a parallel port, game port, or a universal serial bus (USB).

[0034] A monitor 172 or other type of display device is also connected to bus 136 via an interface, such as a video adapter 174. In addition to monitor 172, personal computers typically include other peripheral output devices (not shown), such as speakers and printers, which may be connected through output peripheral interface 175.

[0035] Computer 130 may operate in a networked environment using logical connections to one or more remote computers, such as a remote computer 182. Remote computer 182 may include many or all of the elements and features described herein relative to computer 130.

[0036] Logical connections shown in Fig. 1 are a local area network (LAN) 177 and a general wide area network (WAN) 179. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets, and the Internet.

[0037] When used in a LAN networking environment, computer 130 is connected to LAN 177 via network interface or adapter 186. When used in a WAN networking environment, the computer typically includes a modem 178 or other means for establishing communications over WAN 179. Modem 178, which may be internal or external, may be connected to system bus 136 via the user input interface 170 or other appropriate mechanism.

[0038] Depicted in Fig. 1, is a specific implementation of a WAN via the Internet. Here, computer 130 employs modem 178 to establish communications with at least one remote computer 182 via the Internet 180.

[0039] In a networked environment, program modules depicted relative to computer 130, or portions thereof, may be stored in a remote memory storage device. Thus, e.g., as depicted in Fig. 1, remote application programs 189 may reside on a memory device of remote computer 182. It will be appreciated that the network connections shown and described are exemplary and other means of establishing a communications link between the computers may be used.

Improved Rate/Distortion Optimization Techniques:

[0040] Although the following sections describe certain exemplary methods and apparatuses that are configured to initially compress/encode and decompress/decode image data and/or video data, those skilled in the art of data compression will recognize that the techniques presented can be adapted and employed to compress/encode and decompress/decode other types of data. For example, certain methods and apparatuses may be adapted for use in compressing/encoding audio data, speech data and the like.

[0041] Furthermore, although the exemplary methods and apparatuses can be configured in logic within a computer, those skilled in the art will recognize that such methods and apparatuses may be implemented in other types of devices, appliances, etc. The term "logic" as used herein is meant to include hardware, firmware, software, or any combination thereof, and any other supporting hardware or other mechanisms as may be required to fulfill the desired functions, either fully or partially.

[0042] With this in mind, several exemplary schemes are presented that can be implemented in some form of logic to support the processing of data.

[0043] In accordance with certain aspects of the present invention, several novel techniques are presented for improving the performance of video and/or image encoding/decoding systems. In some exemplary implementations, these techniques are employed for use with image/video coding standards such as JPEG and JVT (Joint Video Team) Standard (e.g., H.264/AVC). By way of example, for the case of JVT, syntax changes are presented that can operatively enable an adaptive selection of different prediction types that can be used for predicting certain parameters of the video, such as, e.g., motion information.

[0044] Rate Distortion Optimization (RDO) techniques are quite popular in video and image encoding/decoding systems since they can considerably improve encoding efficiency compared to more conventional encoding methods. There is a continuing desire to provide even more encoding efficiency. This description describes methods and apparatuses that can significantly improve the performance of RDO or other like techniques to achieve improved coding efficiency versus existing systems.

[0045] In accordance with certain further aspects of the present invention, one may also further combine and improve RDO or other like techniques with image pre-analysis concepts, such as, for example, edge and/or texture detection, by using adaptive and/or variable size Deadzone quantizers depending on the characteristics of the image or macroblock.

[0046] This description also introduces/defines some additional exemplary syntax changes that can be implemented to enable a combination of different prediction schemes at a frame level, for example, thus further improving the performance of video coding schemes. By way of example, one technique arises from the fact that for some frames or portions of a sequence, motion may be more correlated in a temporal domain than in a spatial domain, or vice versa. This could be exploited by performing a pre-analysis of the frame, but also through encoding the same frame using two or possibly more different methods and selecting a preferred method in an RDO and/or RDO-like sense. The preferred method may then be signaled in the resulting data, for example, in the frame header, to allow a decoder to properly decode the frame. Here, for example, one such exemplary method may include the possible variation of a Direct Mode within B frames by either using a spatial prediction or a temporal prediction, or a Skip Mode motion vector selection within P frames by using either spatial predicted motion vector parameters or temporally predicted motion vector parameters, or even zero.

Applying adaptive and/or variable Deadzone Quantization to data according to one or more characteristics (parameters):

[0047] In image data compression systems part of the data to be compressed, such as, for example, blocks or macroblocks, may actually include more significant information that when compared to other information (data) should be coded differently (e.g., at a higher priority, in a higher quality, etc.). One way to accomplish this is to use different quantizer values. For example, in certain implementations a smaller quantizer value may be used for "more important information" and a larger quantizer value may be used for the "less important information". However, doing so would also typically require the transmission of information identifying each quantizer value used for each block, macroblock, groups of macroblocks, etc., so that subsequent decompressing/decoding is successful. Unfortunately, such additional information tends to increase the compressed overhead and the complexity of the encoder. Thus, instead of increasing efficiency there may actually be a reduction in efficiency.

[0048] Attention is drawn to Figs 2(a-d), which are each illustrative graphs depicting certain exemplary Quantizers employable within certain exemplary image/video coding schemes. In each of Figs 2a-d, the vertical (y-axis) represents quantized values and the horizontal (x-axis) represents original values. The illustrated exemplary Deadzone Quantizer 202 in Fig. 2(a), for example, is associated with a Deadzone Quantization A that can considerably improve coding efficiency versus a uniform quantizer. Conventional Deadzone Quantizers are often kept constant or uniform throughout the quantization process thus, possibly, not exploiting completely all existing redundancies within the data.

[0049] By considering or otherwise taking into account the importance of certain information within data and by adapting/modifying the Deadzone Quantizer at a block/macroblock basis, for example, an improvement in coding efficiency may be achieved. This can be done, for example, by adapting the coverage of each quantization bin (e.g., along the x-axis), but without changing the reconstructed value. For example, compare Deadzone Quantizer 202 to Deadzone Quantizers 204, 206 and 208 of Figs 2(b, c, and d), respectively. Here, the reconstructed values may remain constant throughout the coded data, unless of course a change in quantization parameters is signaled. For example, by increasing the zero bin (Fig. 2(c)) more data will be assigned to it, thus, depending on the compression scheme, achieving higher compression. There is obviously no need on the decoder to signal the change in the quantizer since the reconstructed values remain the same. Even though one could argue that such would impair the performance of the quantization, this is not necessarily always true if such processes are done selectively when certain condition(s) are satisfied, for example, if the compression is achieved using the new quantizer is considerably higher than the incurred distortion.

[0050] In Fig. 2(b), for example, the Deadzone quantizer only affects the zero bin versus the first positive/negative bins, where as all other bins remain the same and there is no change to the reconstructed value used. An adaptive scheme with adaptive estimate of the Deadzone is also possible (e.g., using Rate distortion optimization and adaptive estimate).

[0051] In accordance with certain exemplary implementations of the present invention, quantization selecting logic is therefore provided in the compressing/encoding system to select between different Deadzone Quantizers (or quantization values) based on at least one characteristic or parameter. For example, the logic may select between different Deadzone Quantizers 202, 204, 206 and 208 according to certain image characteristics.

[0052] More particularly, the logic may be configured to characterize texture and/or edges within the image data as representing "more important" information and therefore code such data in a manner to provide a higher level of quality. The logic can use conventional texture analysis/detection and edge detection algorithms to support such decision processes.

[0053] With this concept in mind, reference is now made to Fig. 3, which is a flow-diagram illustrating a method 300 for selectively applying different quantization processes to data, in accordance with certain implementations of the present invention. In act 302, an initial data set is divided into a plurality of portions of data. For example, image or video data may be divided into a plurality of blocks, macroblocks, slits, slice, sections, etc. In act 304, at least one of the plurality of portions of data from act 302 is classified in some manner, for example, based on at least one characteristic or parameter. For example, the classification may be based on edge characteristics, texture characteristics, smoothness characteristics, luminance characteristics; chrominance characteristics, color characteristics, noise characteristics, object characteristics, motion characteristics, user preference characteristics, user interface focus characteristics, layering characteristics; timing characteristics, volume characteristics, frequency characteristics, pitch characteristics, tone characteristics, quality characteristics, bit rate characteristics; data type characteristics, resolution characteristics, encryption characteristics.

[0054] In act 306, the classified portion from act 304 is processed using at least two of a plurality of quantization processes to produce corresponding quantized data. In act 308, a decision is made wherein one of the quantized data from act 306 is selected, for example, based on satisfying at least one threshold value or measurement that is associated with the classification parameter used in act 304. In act 310, the quantized data from act 308 is encoded in some manner that allows it to be subsequently decoded.

[0055] Using method 300, logic can be provided that essentially analyzes portions of image or video data and deems certain portions to be more important than others. Different Deadzone Quantizers are then applied to the more important data portions and the resulting quantized data analyzed to determine which Deadzone Quantizer(s) satisfy a desired threshold requirement for this more important data. For example, a quality or noise threshold requirement may be enforced.

[0056] By way of further example, in video sequences edges often play a significant role in motion compensation techniques. This is illustrated, for example, in the block diagram depicted in Fig. 7 that is described in greater detail below. Basically, it is possible to perform image analysis on an image (frame) or portion thereof, and according to the analysis decide which one of a plurality of Deadzone Quantizers is best to use to use, for example, according to Rate Distortion Optimization (RDO) criterion.

[0057] With reference to Fig. 4, logic 400 illustrates an on-the-fly decision process in accordance with certain exemplary implementations of the present invention. Here, an input frame/image (or portion thereof) is subjected to image analysis in block 402. In this example, the image analysis includes an edge detection and/or texture analysis capability and the output is provided to a Deadzone decision block 404. Deadzone decision block 404 then causes an encoder 406 to use a specified or otherwise selected Deadzone Quantizer or quantization value(s) when encoding the input frame/image (or portion thereof).

[0058] Rather than making an on-the-fly decision regarding Deadzone Quantization, logic 500 in Fig. 5, is configurable to support method 300, wherein a plurality of Deadzone Quantizers are used and an RDO decision is made based on certain threshold criteria. Here, an input macroblock (MB)/image 502 (or other like portion) is (selectively) provided to different Deadzone encoding blocks 504, 506, 508, and/or 510, and the outputs from of these various Deadzone encoding blocks are analyzed in RDO decision block 512 and the selected encoded data output. As illustrated in this example, some or all of the Deadzone encoding blocks/processes may occur in parallel. In other implementations, such processes may be timed to occur serially.

[0059] Fig. 6(a) and Fig. 6(b) illustrate logic wherein a selective recoding decision process is used. In Fig. 6(a), for example, input MB/image 502 is provided to Deadzone encoding blocks 602 and 604. A recoding decision block 606 considers the output from Deadzone encoding block 602 and affects the selection 608 between the outputs of Deadzone encoding blocks 602 and 604. Recoding decision block 606 may also selectively initiate Deadzone encoding block 604. In Fig. 6(b), logic 610 is similar to logic 600 but rather than having selection 608 associated with recoding decision block 606 includes an RDO decision block 612 that is configured to analyze the outputs from Deadzone encoding blocks 602 and 604 and decide which to output.

[0060] Recoding decision block 606 in Figs 6(a, b) may be configured to make decisions based on various criteria. For example, in certain implementations, quality limits, rate limits and/or other RDO concepts/thresholds may be considered.

[0061] It is also possible to use the additional Deadzone quantizers only if some previously defined conditions are satisfied, such as for example the rate/quality is above a particular threshold. In certain exemplary a Deadzone Quantizer was successfully selected which had about a 30% larger Deadzone than the original. Other, possibly adaptive according to image characteristics such as AC frequencies or edge types, Deadzone quantizers may also be used.

[0062] In Fig. 7, exemplary encoding logic 700 illustratively demonstrates how an initial image 702 (or portion thereof) is processed according to an image analysis process 704 to produce, in this example, edge detection data 706. Edge detection data 706 is then provided to a block classification process 708 to produce block classified data 710. Block classified data 710 is then provided along with initial image 702 to an image encoding process 712, which then produces encoded image 714. This is one example, of a simple encoding process for an image. Here, the image is analyzed (e.

g. using an edge detection algorithm) and then blocks are classified according to such information. Essentially a N -ary matrix (DZ_p) is defined (N depends on the number of Deadzones defined) which later on assigns the proper Deadzone (DZ) for the Quantizer (QP) assigned at Macroblock at position (i,j) .

5 Consideration of non residual modes (e.g., for B frame Direct Mode):

[0063] Even though the above description might appear to be mainly focused on still images, the same concepts could be easily applied on video as well. For example, the image pre-analysis and the Deadzone quantizers can be used in a rather straightforward manner in video compression as well.

10 [0064] One case that appears quite interesting and can considerably benefit from the above concepts is the usage of Direct Mode within B frames. Direct Mode is basically a special mode which requires no transmission of motion parameters since such can be directly predicted through either spatial or temporal prediction. Additional information on Direct Mode can be found in co-pending U.S. Provisional Patent Application Serial No. 60/385,965.

15 [0065] If there is no residue to be transmitted, efficiency can be improved further by the usage of a special mode, referred to herein as a Non Residual Direct Mode, in accordance with certain further aspects of the present invention. As described below, the Non Residual Direct Mode can be configured to exploit Run Length enCoding (RLC) strategies. Here, for example, if the distortion incurred is small enough and the reduction in bitrate due to the higher efficiency of the RLC is significant enough, then a Deadzone quantizer may provide a desirable solution. The basic idea is to selectively cause or otherwise force the Direct Mode, under certain conditions, to be coded without Residue even though such exists. Schemes based on the same concepts as in Fig. 5, for example, as shown in Fig. 9 may be implemented wherein the non residual direct mode is also examined within the RDO process compared to all other available modes. In certain instances, the performance of such scheme may not be as good as expected since the RDO used is inadequate for such cases. Other processes, which are dependent on the Quantization values, are also affected, such as, for example, an in-loop filter (not shown) that used to remove blocking artifacts. More specifically, even though performance appears to be good at lower bit rates, performance may suffer significantly at higher bit rates; it could be even outperformed by the usage of a larger quantizer and without the consideration of the Non Residual Direct Mode.

20 [0066] Similar to what was done in the images examples, in accordance with certain aspects of the present invention the logic can be Configured to consider such modes only if some previously defined conditions are satisfied and in particular if the residue associated with the Direct Mode is not significant. The logic may, for example, be configured to use as a condition an estimate of how significant this residue is by examining the Coded Block Pattern (CBP) of the Direct Mode. If the CBP, without considering chrominance information, is below a particular threshold then this may be considered to imply that the residue is not as significant and if skipped it might not incur too much distortion. Further, other image characteristics such as the non existence of edges and texture may also be used within such video encoding processes/logic.

25 [0067] In certain implementations, the logic may even extend this even further by examining whether only the chrominance residue could be removed while keeping all luminance residue intact. It is also possible to extend such concepts to all possible modes for a macroblock that is to examine whether by sending no residue entirely, or no chrominance for this mode would give better performance. Obviously though such could increase the encoding complexity even further.

30 [0068] With regard to Fig. 9, logic 900 illustrates how an input MB/image 902 is provided to different Direct Mode (B frames) or Copy Mode (Inter frames) encoding process blocks 902, 904, 906, and 908 and the outputs from those process blocks provided to a frame based RDO decision block 910 that selects an appropriate output.

35 [0069] With regard to Fig. 10, logic 1000 further illustrates how a scheme decision block 1002 and selection 1004 can also be included to provide additional selectability depending on user inputs, the application, system requirements, etc. Here, scheme decision block 1002 selectively provides input MB/image to one or more of the Direct Mode (B frames) or Copy Mode (Inter frames) encoding process blocks 902, 904, 906, and 908. Selection 1004 may be controlled by scheme decision block 1002 or other processes/logic/inputs.

40 Exemplary use of Lagrangian multiplier for B frames:

45 [0070] RDO techniques are often based on the concepts of Lagrangian Multipliers. For example, a specific mode may be selected that jointly minimizes distortion and bit rate.

[0071] Such a function can be expressed as the minimization of:

$$J(\text{Mode} | \text{QP}, \lambda) = \text{SSD}(\text{Mode} | \text{QP}) + \lambda \cdot R(\text{Mode} | \text{QP})$$

where QP is the macroblock quantizer, λ is the Lagrangian multiplier for mode decision, and Mode indicates the

macroblock mode that is to be examined and possibly selected within the RDO process.

[0072] By way of example, in certain implementations, the Lagrangian multiplier λ can be selected for Inter or Intra frames as:

$$\lambda_{I,P} = 0.85 \times 2^{\frac{QP}{3}}$$

or

$$\lambda_{I,P} = 5 \times \frac{QP + 5}{34 - QP} \times \exp^{\frac{QP}{10}}$$

whereas in B frames, in most codecs such as JVT, this is selected as $\lambda_B = 4 \times \lambda_{I,P}$.

[0073] The additional weighting of λ was done in order to give preference to lower overhead modes, since particularly for B frames, modes can have large overhead due to the multiple motion information transmitted, while the lower overhead modes, such as the Direct Mode, could still provide a very good, in terms of RDO, performance.

[0074] Based on certain experiments in accordance with the present invention, however, it has been found that the weighting should not be constant as described above, but instead it should be dependent again on the quantizer QP value.

[0075] In particular, if one defines $\lambda_B = f(QP) \times \lambda_{I,P}$, from these experiments it has been found that two $f(QP)$ functions that could be used with much better compression efficiency than the fixed $f(QP) = 4$ case are:

$$f(QP) = \max\left(2, \min\left(4, \frac{QP}{6}\right)\right)$$

and

$$f(QP) = \max\left(2, \min\left(4, \frac{QP + 2}{8}\right)\right).$$

[0076] This observation also comes from the fact that by having a very high λ , one may also be affecting the accuracy of other important information, such as, for example, that of the motion prediction, which in consequence may have a negative impact to the encoding of the surrounding macroblocks.

Using adaptive type selection of prediction dependent MB modes:

[0077] As also described in co-pending U.S. Provisional Patent Application Serial No. 60/385,965, co-pending U.S. Provisional Patent Application Serial No. 60/376,005, and co-pending U.S. Patent Application Serial No. 10/186,284, sequences and frames may have different types of dominant motion correlation.

[0078] In particular, for small objects with constant speed in a stationary background, the usage of motion vectors (MVs) from temporally adjacent frames (temporal domain) enable one to perform better prediction, and yield higher performance. Larger objects with smooth motion may instead have higher correlation in the spatial domain (adjacent macroblocks), whereas in other cases information from both spatial and temporal domain may be important for the prediction. These types of correlations are partly exploited, such as, for example within the Direct Mode in B and P frames and Skip on Motion Vector Predictor in P frames. For more information on Skip on Motion Vector Predictor in P frames see, e.g., Jani Lainema and Marta Karczewicz, "Skip mode motion compensation", document JVT-C027, JVT Meeting, Fairfax, May 2002. Thus, if the logic somehow signals which type of prediction is predominant at different frames, considerably higher performance can be achieved.

[0079] Hence, in accordance with certain aspects of the present invention, the encoding logic is configured to signal or otherwise identify in some manner at the frame, slice, or some other like level, which prediction scheme for prediction dependent modes is to be used. One exemplary syntax for accomplishing this, as an example within JVT, is presented in chart 800 in Fig. 8. Such syntax could, of course, be modified/different in other encoding designs.

[0080] With regard to the exemplary syntax in chart 800, three (3) possible prediction cases are allowed for the P frame skip mode. In this example, there is a Motion-Copy prediction mode, a temporal prediction skip mode and the zero skip mode. Each one of these cases is assigned a value between {0, 1, 2}, which can be coded using either a fixed size codeword, in this example $u(2) = 2$ bits, or is even entropy coded (e.g., $e(v)$ using UVLC or CABAC). Those skilled in the art will recognize other ways of conveying Such information that may also be employed. In chart 800, which illustrates Picture Layer RBSP Syntax within JVT with the addition of Adaptive Spatial/Spatio-temporal consideration for B Frames (direct_mv_spatial) and Adaptive Copy/Motion-Copy Skip mode in Inter frames (copy_mv_spatial). If only these two modes are used, then the defined descriptors may take only 1 bit, thus $u(n=1)$, but if more cases are to be used (spatial prediction with zero bias or consideration of stationary temporal prediction) then more bits could be assigned ($n>1$) or even use entropy coding for this parameter defined by $e(v)$.

[0081] For B frames, in this example, Spatial motion vector prediction may be used for all Direct Mode motion parameters as one mode, and the temporally predicted parameters as a second mode. Other direct modes as described, for example, in co-pending U.S. Provisional Patent Application Serial No. 60/385,965 may also be considered/included. The encoding logic is configured to signal which prediction mode is to be used at the Frame or slice level. The selection can be performed, for example, using an RDO based scheme (e.g., Fig. 9). In certain implementations, the encoding logic may also make use a specific mode explicitly due to specific requirements placed on the encoder and/or decoder. In one particular example, considering that the Spatial Prediction is usually computationally simpler (e.g., requiring no division, no storage of the motion vectors, and is independent to timing information), it may be the preferred choice for some applications (e.g., Fig. 10).

[0082] In others implementations, where such problems are not an issue, the combination may yield further improved encoding performance. One example of an encoded sequence is shown in the illustrative diagram of Fig. 11. Here, P and B frames are shown along with a scene change. As illustrated by the arrows differently signaled P and B frames are shown for corresponding Skip, or Direct mode macroblocks. Note also that the signaling can be an indication of how the encoding logic should perform the motion vector prediction for the motion vector coding, or for the prediction of other modes (e.g., Direct P described in co-pending U.S. Provisional Patent Application Serial No. 60/376,005 and co-pending U.S. Patent Application Serial No. 10/186,284).

[0083] As shown in Fig. 11, different frames signal different type of prediction for their corresponding Direct (B) and Skip (P) modes. P_z , P_T , and P_M , define for example zero, temporal and spatial (Motion-Copy) prediction, and B_T and B_{SP} define temporal and spatial prediction for Direct mode.

Time Stamp independent Direct Mode, with the consideration of stationary temporal/spatial blocks:

[0084] Different types of prediction, especially for the Direct Mode in B frames, may be more appropriate for different types of motion and sequences. Using temporal or spatial prediction only, may in some cases provide acceptable performance, but in others performance might be considerably worse. A solution as was described the preceding section, or for the cases presented in co-pending U.S. Provisional Patent Application Serial No. 60/385,965 may provide even better performance.

[0085] By way of example, one additional case is presented which appears to be quite efficient and that combines the performance of both temporal and spatial predictors, while tending to keep the spatial predictor simple by not requiring division, and/or which is timing independent.

[0086] In certain implementations, spatial prediction may be more useful (e.g., due to its properties) than temporal prediction. Thus, for example, spatial prediction is used as the main prediction of Direct Modes. One possible exception is made when the motion information and the reference frame from the temporal predictors are zero. In such a case, the motion information and reference frame for the corresponding block of the direct mode is also considered to be zero. Furthermore, the spatial prediction is refined by also considering a spatial zero biased-ness and/or of stationary subpartitions. Accordingly, if any or some of the adjacent macroblocks or blocks to the currently predicted block have zero motion (or very close (e.g. integer motion vector is zero) and reference frame, then also the entire macroblock, or part of it is also considered to have zero motion. Both of these concepts help in protecting stationary backgrounds, which, in particular at the edges of moving objects, might be quite distorted if such conditions are not introduced.

[0087] A flow diagram 1200, simplified for the case of a 16x16 Macroblock, is shown in Fig. 12. It is noted that such concepts using spatial prediction for the direct mode, may also be extended to even smaller blocks (e.g. 8x8 or 4x4) (or larger blocks or other shaped portions). In act 1202, spatial predictors MV_a , MV_b , and MV_c and temporal predictor MV_t are provided to act 1204, wherein MV_{Direct} is set to a Median (MV_a , MV_b , MV_c). In act 1206 a decision is made based on MV_t that leads to either act 1208 wherein MV_{Direct} is set to zero, or act 1210 for an additional decision. As result of act 1210, MV_{Direct} is either set to zero in act 1208 or not changed, and MV_{Direct} is output.

[0088] In this description, several concepts related to Rate Distortion Optimization for the encoding of images, video sequences, or other types of data have been presented. Additional syntax has been demonstrated that may be adopted within video sequences that enables considerably higher compression efficiency by allowing several alternative pre-

5 diction cases, especially for cases such as the Skip and Direct Mode within P and B frames respectively, which may be signaled at the beginning of the image. A high efficiency time stamp independent Direct Mode for B frames has been presented which considers spatial motion vector prediction as well with stationary temporal predictors. All or part of the above methods and apparatuses can be implemented to significantly improve the performance of various image/ video/data coding systems.

10 **[0089]** Although some preferred implementations of the various methods and apparatuses of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the exemplary embodiments disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention.

Claims

1. A method comprising:

15 processing at least a portion of data using a plurality of different quantization functions to produce a plurality of corresponding quantized portions of data; and selectively outputting one of said quantized portions of data based on at least one threshold value.

2. The method as recited in Claim 1, further comprising:

20 dividing initial data into a plurality of portions including said at least one portion of data; and classifying said at least one portion of data based on at least one classification characteristic.

3. The method as recited in Claim 2, wherein said at least one threshold value is associated with said at least one classification characteristic.

4. The method as recited in Claim 2, wherein said initial data includes data selected from a group comprising image data, video data, audio data, and speech data.

5. The method as recited in Claim 2, wherein said initial data includes image data or video data and said at least one portion is selected from a group comprising a block, a macroblock, a slit, a slice, and a section.

6. The method as recited in Claim 2, wherein said at least one classification characteristic is selected from a group of characteristics comprising an edge characteristic, a texture characteristic, a smoothness characteristic, a luminance characteristic, a chrominance characteristic, a color characteristic, a noise characteristic, an object characteristic, a motion characteristic, a user preference characteristic, a user interface focus characteristic, a layering characteristic, a timing characteristic, a volume characteristic, a frequency characteristic, a pitch characteristic, a tone characteristic, a quality characteristic, a bit rate characteristic, a data type characteristic, a resolution characteristic, and an encryption characteristic.

7. The method as recited in Claim 1, wherein said plurality of different quantization functions include at least two operatively different Deadzone Quantizers.

8. The method as recited in Claim 7, wherein at least one of said Deadzone Quantizers includes an adaptive coverage Deadzone Quantizer.

9. The method as recited in Claim 7, wherein at least one of said Deadzone Quantizers includes a variable coverage size Deadzone Quantizer.

10. The method as recited in Claim 1, wherein selectively outputting said one of said quantized portions of data based further includes:

55 encoding said one of said quantized portions.

11. The method as recited in Claim 1, wherein selectively outputting said one of said quantized portions of data based on said at least one threshold value further includes performing Rate Distortion Optimization (RDO) to select said one of said quantized portions of data.

12. A method comprising:

performing at least one characteristic analysis on at least one portion of image data;
selectively setting at least one adaptive quantization parameter within an encoder based on said at least one
characteristic analysis; and
encoding said at least one portion of image data with said encoder.

13. The method as recited in Claim 12, wherein said at least one characteristic analysis considers at least one image analysis characteristic selected from a group of characteristics comprising an edge characteristic, a texture characteristic, a smoothness characteristic, a luminance characteristic, a chrominance characteristic, a color characteristic, a noise characteristic, an object characteristic, a motion characteristic, a user preference characteristic, a user interface focus characteristic, a layering characteristic, a timing characteristic, a quality characteristic, a bit rate characteristic, a data type characteristic, and a resolution characteristic.

14. The method as recited in Claim 12, wherein said at least one adaptive quantization parameter is associated with an adaptive coverage Deadzone Quantizer within said encoder.

15. The method as recited in Claim 12, wherein selectively setting said at least one adaptive quantization parameter within said encoder based on said at least one characteristic analysis is performed on-the-fly while for each of a plurality of portions of said image data which includes a video frame.

16. A method comprising:

causing at least one portion of image data to be encoded using at least two different Deadzone Quantizers; and
identifying preferred encoded data in an output of one of said at least two different Deadzone Quantizers based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

17. A method comprising:

causing at least one portion of image data to be encoded using a first Deadzone Quantizer;
determining if an output of said first Deadzone Quantizer satisfies at least one decision factor and
if so, then outputting said output of said first Deadzone Quantizer;
if not, then causing said at least one portion of image data to be encoded using at least a second Deadzone Quantizer that is different from said first Deadzone Quantizer.

18. The method as recited in Claim 17, further comprising:

identifying an acceptable encoded version of said at least one portion of said image data based on a Rate Distortion Optimization (RDO) decision.

19. A method comprising:

performing image analysis on at least one portion of image data;
performing block classification on said analyzed portion of image data;
performing Deadzone Quantization of said block classified portion of image data; and
performing encoding of said Deadzone Quantized portion of image data.

20. The method as recited in Claim 19, wherein said image analysis includes at least one type of analysis selected from a group comprising edge detection analysis and texture analysis.

21. The method as recited in Claim 19, wherein said block classification is operatively configured based on said image analysis and said Deadzone Quantization is operatively configured based on said block classification.

22. A method comprising:

causing at least one portion of video image data to be encoded using at least two different encoders wherein at least one of said two different encoders includes a Deadzone Quantizer operatively configured to support a Non Residual Mode of said video image data; and

identifying preferred encoded frame data in an output of one of said at least two different encoders based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

- 5 23. The method as recited in Claim 22, wherein said Deadzone Quantizer is adaptive and selectively causes said Non Residual Mode to be used.
24. The method as recited in Claim 22, wherein at least one of said encoders is operatively configured to support a Direct Mode of said video image data.
- 10 25. The method as recited in Claim 22, wherein at least one of said encoders is operatively configured to support a Copy Mode of said video image data.
26. The method as recited in Claim 22, wherein said Non Residual Mode is operatively configured based on a Run Length encoding (RLC) strategy.
- 15 27. The method as recited in Claim 22, wherein said Deadzone Quantizer is operatively adaptive.
28. The method as recited in Claim 22, wherein said Deadzone Quantizer is operatively configured based on at least one characteristic associated with said at least one portion of video image data.
- 20 29. The method as recited in Claim 22, wherein identifying said preferred encoded frame data further includes analyzing an amount of a residue associated with said Direct Mode frame data.
30. The method as recited in Claim 29, wherein analyzing said amount of said residue further includes examining a Coded Block Pattern (CBP) of said Direct Mode frame data.
- 25 31. The method as recited in Claim 22, wherein said encoder having said Deadzone Quantizer is selectively configured to remove at least one type of residue selected from a group of residue data comprising chrominance residue data, luminance residue data, and all residue data.
- 30 32. A method comprising:
selectively varying at least one Lagrangian multiplier that is operatively configuring encoding logic having a quantizing function based on at least one characteristic of at least one portion of image data; and
35 encoding said at least one portion of said image data using said encoding logic.

33. The method as recited in Claim 32, wherein said quantizing function includes a macroblock quantizer based on:

40
$$J(\text{Mode} | QP, \lambda) = SSD(\text{Mode} | QP) + \lambda \cdot R(\text{Mode} | QP)$$

wherein λ is said Lagrangian multiplier for a mode decision and Mode indicates a macroblock mode that is examined using a Rate Distortion Optimization (RDO) process.

- 45 34. The method as recited in Claim 32, wherein said Lagrangian multiplier is selected for Inter or Intra frames.

35. The method as recited in Claim 33, wherein:

50
$$\lambda = f(QP) \times \lambda_{I,P};$$

and

55
$$f(QP) = \max\left(2, \min\left(4, \frac{QP}{6}\right)\right).$$

36. The method as recited in Claim 33, wherein:

$$\lambda = f(QP) \times \lambda_{I,P};$$

and

$$f(QP) = \max\left(2, \min\left(4, \frac{QP+2}{8}\right)\right).$$

37. A method comprising:

encoding at least a portion of video image data using encoder logic; and
causing said encoder logic to output syntax information identifying a type of motion vector prediction employed by said encoder logic.

38. The method as recited in Claim 37, wherein said encoder logic is configured to selectively employ at least one type of motion vector prediction selected from a group comprising spatial motion vector prediction and temporal motion vector prediction and wherein said encoder logic is configured to selectively output said syntax information and corresponding encoded video image data based at least in part on a Rate Distortion Optimization (RDO) decision.

39. A method for use in conveying video encoding related information, the method comprising:

encoding video data; and
selectively setting at least one descriptor within a syntax portion of said encoded video data, said descriptor identifying an adaptive spatial/spatio-temporal encoding associated with at least one B frame encoded with said video data.

40. The method as recited in Claim 39, wherein encoding said video data includes encoding said video data in accord with a JVT Standard, and said at least one descriptor within said syntax portion of said encoded video data includes a direct_mv_spatial parameter with a picture layer portion of said encoded video data.

41. A method for use in conveying video encoding related information, the method comprising:

encoding video data; and
selectively setting at least one descriptor within a syntax portion of said encoded video data, said descriptor identifying an adaptive copy/motion-copy skip mode in at least one inter frame encoded with said video data.

42. The method as recited in Claim 41, wherein encoding said video data includes encoding said video data in accord with a JVT standard, and said at least one descriptor within said syntax portion of said encoded video data includes a copy_mv_spatial parameter with a picture layer portion of said encoded video data.

43. A method for use in a time stamp independent mode encoding of video considering stationary temporal/spatial portions of video frames, the method comprising:

selectively applying spatial prediction of motion associated with at least one portion of a video frame in a video sequence; and
if temporal motion prediction information for a reference portion of another video frame is zero, then setting said spatial prediction of motion to zero.

44. The method as recited in Claim 43, wherein said spatial prediction is spatial zero biased.

45. The method as recited in Claim 43, wherein said spatial prediction further considers stationary sub-partitions of other portions in said video frame, and wherein, if at least one of said sub-partitions has a corresponding motion that is approximately zero, then said other portion is also considered to have zero motion.

46. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

processing at least a portion of data using a plurality of different quantization functions to produce a plurality of corresponding quantized portions of data; and
selectively outputting one of said quantized portions of data based on at least one threshold value.

47. The computer-readable medium as recited in Claim 46, further comprising:

dividing initial data into a plurality of portions including said at least one portion of data; and
classifying said at least one portion of data based on at least one classification characteristic.

48. The computer-readable medium as recited in Claim 47, wherein said at least one threshold value is associated with said at least one classification characteristic.

49. The computer-readable medium as recited in Claim 47, wherein said initial data includes data selected from a group comprising image data, video data, audio data, and speech data, and wherein said initial data includes image data or video data and said at least one portion is selected from a group comprising a block, a macroblock, a slit, a slice, and a section.

50. The computer-readable medium as recited in Claim 47, wherein said at least one classification characteristic is selected from a group of characteristics comprising an edge characteristic, a texture characteristic, a smoothness characteristic, a luminance characteristic, a chrominance characteristic, a color characteristic, a noise characteristic, an object characteristic, a motion characteristic, a user preference characteristic, a user interface focus characteristic, a timing characteristic, a volume characteristic, a frequency characteristic, a pitch characteristic, a tone characteristic, a quality characteristic, a bit rate characteristic, a data type characteristic, a resolution characteristic, and an encryption characteristic.

51. The computer-readable medium as recited in Claim 46, wherein said plurality of different quantization functions include at least two operatively different Deadzone Quantizers and wherein at least one of said Deadzone Quantizers includes an adaptive coverage Deadzone Quantizer.

52. The computer-readable medium as recited in Claim 46, wherein selectively outputting said one of said quantized portions of data based on said at least one threshold value further includes performing Rate Distortion Optimization (RDO) to select said one of said quantized portions of data.

53. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

performing at least one characteristic analysis on at least one portion of image data;
selectively setting at least one adaptive quantization parameter within an encoder based on said at least one characteristic analysis; and
encoding said at least one portion of image data with said encoder.

54. The computer-readable medium as recited in Claim 53, wherein said at least one adaptive quantization parameter is associated with an adaptive coverage Deadzone Quantizer within said encoder.

55. The computer-readable medium as recited in Claim 53, wherein selectively setting said at least one adaptive quantization parameter within said encoder based on said at least one characteristic analysis is performed on-the-fly while for each of a plurality of portions of said image data which includes a video frame.

56. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

causing at least one portion of image data to be encoded using at least two different Deadzone Quantizers; and
identifying preferred encoded data in an output of one of said at least two different Deadzone Quantizers based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

57. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:
- causing at least one portion of image data to be encoded using a first Deadzone Quantizer;
determining if an output of said first Deadzone Quantizer satisfies at least one decision factor and
if so, then outputting said output of said first Deadzone Quantizer,
if not, then causing said at least one portion of image data to be encoded using at least a second Dead-
zone Quantizer that is different from said first Deadzone Quantizer.
58. The computer-readable medium as recited in Claim 57, further comprising:
- identifying an acceptable encoded version of said at least one portion of said image data based on a Rate
Distortion Optimization (RDO) decision.
59. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:
- performing image analysis on at least one portion of image data;
performing block classification on said analyzed portion of image data;
performing Deadzone Quantization of said block classified portion of image data; and
performing encoding of said Deadzone Quantized portion of image data
60. The computer-readable medium as recited in Claim 59, wherein said image analysis includes at least one type of analysis selected from a group comprising edge detection analysis and texture analysis.
61. The computer-readable medium as recited in Claim 59, wherein said block classification is operatively configured based on said image analysis and said Deadzone Quantization is operatively configured based on said block classification.
62. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:
- causing at least one portion of video image data to be encoded using at least two different encoders wherein at least one of said two different encoders includes a Deadzone Quantizer operatively configured to support a Non Residual Mode of said video image data; and
identifying preferred encoded frame data in an output of one of said at least two different encoders based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.
63. The computer-readable medium as recited in Claim 62, wherein said Deadzone Quantizer is adaptive and selectively causes said Non Residual Mode to be used.
64. The computer-readable medium as recited in Claim 62, wherein at least one of said encoders is operatively configured to support a Direct Mode of said video image data.
65. The computer-readable medium as recited in Claim 62, wherein at least one of said encoders is operatively configured to support a Copy Mode of said video image data.
66. The computer-readable medium as recited in Claim 62, wherein said Non Residual Mode is operatively configured based on a Run Length encoding (RLC) strategy.
67. The computer-readable medium as recited in Claim 62, wherein said encoder having said Deadzone Quantizer is selectively configured to remove at least one type of residue selected from a group of residue data comprising chrominance residue data, luminance residue data, and all residue data.
68. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:
- selectively varying at least one Lagrangian multiplier that is operatively configuring encoding logic having a

quantizing function based on at least one characteristic of at least one portion of image data; and encoding said at least one portion of said image data using said encoding logic.

69. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

encoding at least a portion of video image data using encoder logic; and causing said encoder logic to output syntax information identifying a type of motion vector prediction employed by said encoder logic.

70. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

encoding video data; and selectively setting at least one descriptor within a syntax portion of said encoded video data, said descriptor identifying an adaptive spatial/spatio-temporal encoding associated with at least one B frame encoded with said video data.

71. The computer-readable medium as recited in Claim 70, wherein encoding said video data includes encoding said video data in accord with a JVT Standard, and said at least one descriptor within said syntax portion of said encoded video data includes a direct_mv_spatial parameter with a picture layer portion of said encoded video data.

72. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

encoding video data; and selectively setting at least one descriptor within a syntax portion of said encoded video data, said descriptor identifying an adaptive copy/motion-copy skip mode in at least one inter frame encoded with said video data.

73. The computer-readable medium as recited in Claim 41, wherein encoding said video data includes encoding said video data in accord with a JVT standard, and said at least one descriptor within said syntax portion of said encoded video data includes a copy_mv_spatial parameter with a picture layer portion of said encoded video data.

74. A computer-readable medium having computer implementable instructions for configuring at least one processing unit to perform acts comprising:

selectively applying spatial prediction of motion associated with at least one portion of a video frame in a video sequence; and if temporal motion prediction information for a reference portion of another video frame is zero, then setting said spatial prediction of motion to zero.

75. The computer-readable medium as recited in Claim 43, wherein said spatial prediction is spatial zero biased.

76. The computer-readable medium as recited in Claim 43, wherein said spatial prediction further considers stationary sub-partitions of other portions in said video frame, and wherein, if at least one of said sub-partitions has a corresponding motion that is approximately zero, then said other portion is also considered to have zero motion.

77. An apparatus comprising logic operatively configured to process at least a portion of data using a plurality of different quantization functions to produce a plurality of corresponding quantized portions of data, and selectively output one of said quantized portions of data based on at least one threshold value.

78. The apparatus as recited in Claim 77, wherein said logic is further configured to divide initial data into a plurality of portions including said at least one portion of data and classify said at least one portion of data based on at least one classification characteristic, and wherein said at least one threshold value is associated with said at least one classification characteristic.

79. The apparatus as recited in Claim 77, wherein said plurality of different quantization functions include at least two operatively different Deadzone Quantizers and wherein at least one of said Deadzone Quantizers includes an

adaptive coverage Deadzone Quantizer.

80. The apparatus as recited in Claim 77, wherein said logic is further configured to perform Rate Distortion Optimization (RDO) to select said one of said quantized portions of data.

81. An apparatus comprising logic operatively configured to perform at least one characteristic analysis on at least one portion of image data, selectively establish at least one adaptive quantization parameter within an encoder based on said at least one characteristic analysis, and encode said at least one portion of image data with said encoder.

82. The apparatus as recited in Claim 81, wherein said at least one adaptive quantization parameter is associated with an adaptive coverage Deadzone Quantizer within said encoder.

83. An apparatus comprising logic operatively configured to cause at least one portion of image data to be encoded using at least two different Deadzone Quantizers, and identify preferred encoded data in an output of one of said at least two different Deadzone Quantizers based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

84. An apparatus comprising logic operatively configured to cause at least one portion of image data to be encoded using a first Deadzone Quantizer, determine if an output of said first Deadzone Quantizer satisfies at least one decision factor, and, if so, then output said output of said first Deadzone Quantizer, else cause said at least one portion of image data to be encoded using at least a second Deadzone Quantizer that is different from said first Deadzone Quantizer.

85. The apparatus as recited in Claim 84, wherein said logic is further configured to identify an acceptable encoded version of said at least one portion of said image data based on a Rate Distortion Optimization (RDO) decision.

86. An apparatus comprising logic operatively configured to perform image analysis on at least one portion of image data, perform block classification on said analyzed portion of image data, perform Deadzone Quantization of said block classified portion of image data, and encode said Deadzone Quantized portion of image data

87. An apparatus comprising logic operatively configured to cause at least one portion of video image data to be encoded using at least two different encoders wherein at least one of said two different encoders includes a Deadzone Quantizer operatively configured to support a Non Residual Mode of said video image data, and identify preferred encoded frame data in an output of one of said at least two different encoders based on a Rate Distortion Optimization (RDO) decision associated with at least one decision factor.

88. The apparatus as recited in Claim 87, wherein said Deadzone Quantizer is adaptive and selectively causes said NonResidual Mode to be used.

89. The apparatus as recited in Claim 87, wherein at least one of said encoders is operatively configured to support at least one mode selected from a group comprising a Direct Mode of said video image data and a Copy Mode of said video image data.

90. An apparatus comprising logic operatively configured to selectively vary at least one Lagrangian multiplier that is operatively configuring encoding logic having a quantizing function based on at least one characteristic of at least one portion of image data, and encode said at least one portion of said image data using said encoding logic.

91. An apparatus comprising logic operatively configured to encode at least a portion of video image data using encoder logic, and cause said encoder logic to output syntax information identifying a type of motion vector prediction employed by said encoder logic.

92. An apparatus comprising logic operatively configured to encode video data, and selectively set at least one descriptor within a syntax portion of said encoded video data, said descriptor identifying an adaptive spatial/spatio-temporal encoding associated with at least one B frame encoded with said video data.

93. An apparatus comprising logic operatively configured to encode video data, and selectively set at least one descriptor within a syntax portion of said encoded video data, said descriptor identifying an adaptive copy/motion-

EP 1 379 090 A2

copy skip mode in at least one inter frame encoded with said video data.

- 5 94. An apparatus comprising logic operatively configured to selectively apply spatial prediction of motion associated with at least one portion of a video frame in a video sequence, and if temporal motion prediction information for a reference portion of another video frame is zero then setting said spatial prediction of motion to zero.

10

15

20

25

30


35

40

45

50

55

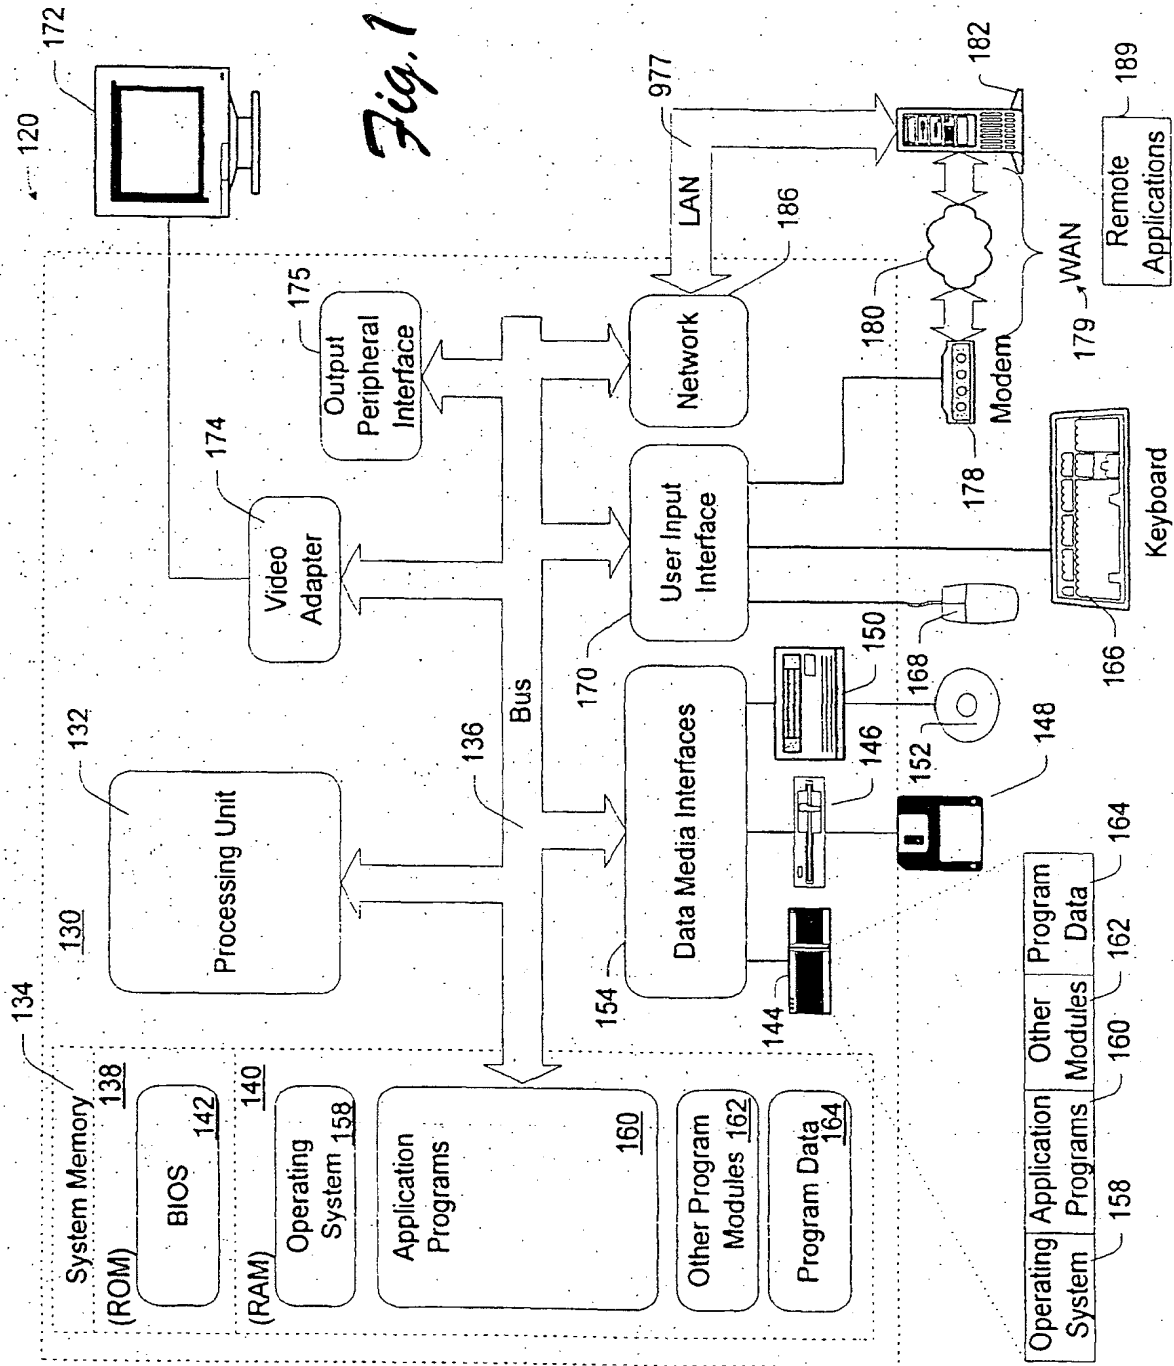

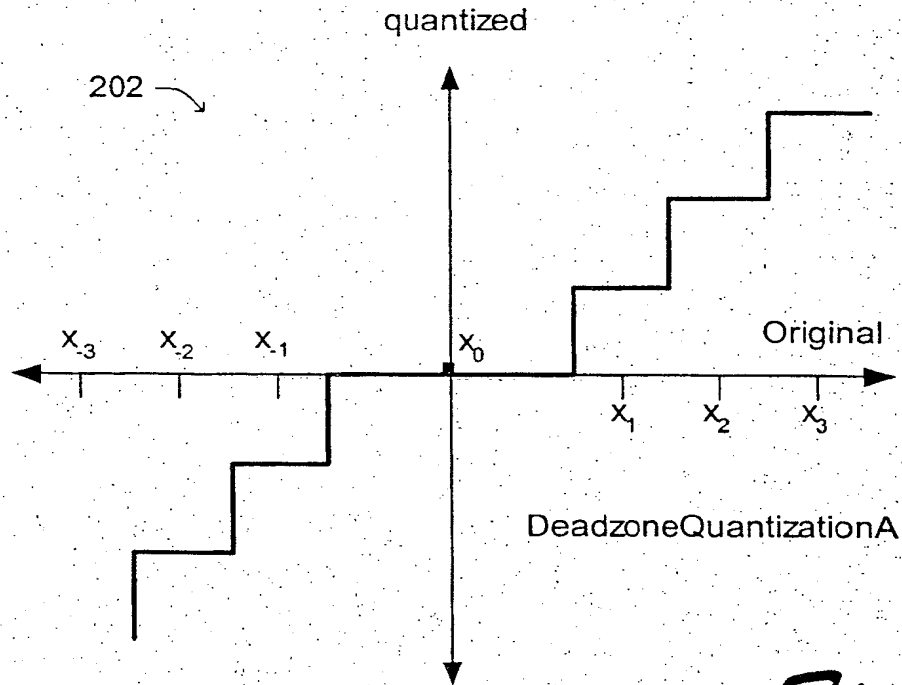


Fig. 2(a)

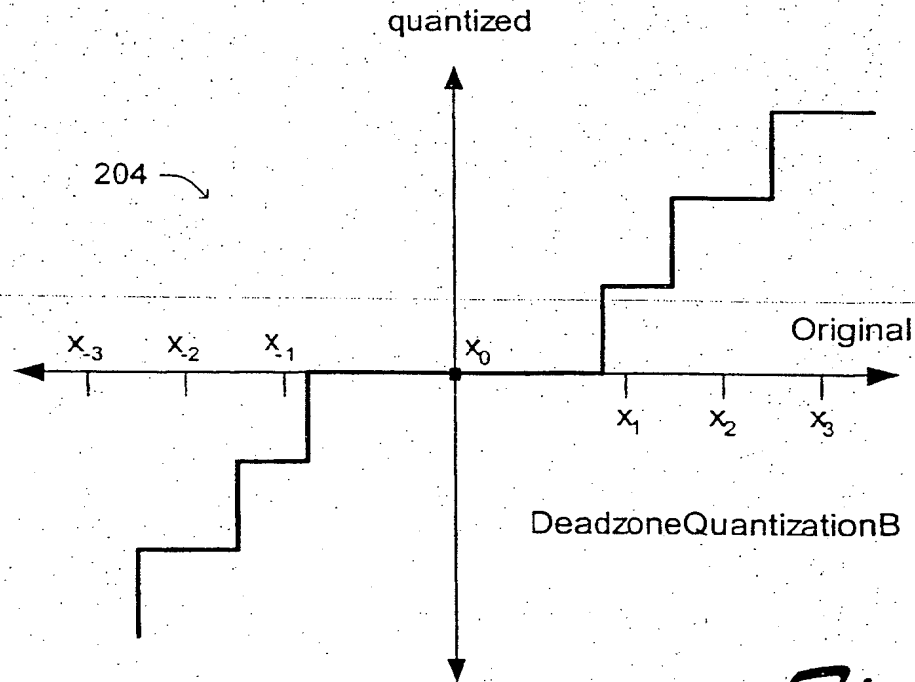


Fig. 2(b)

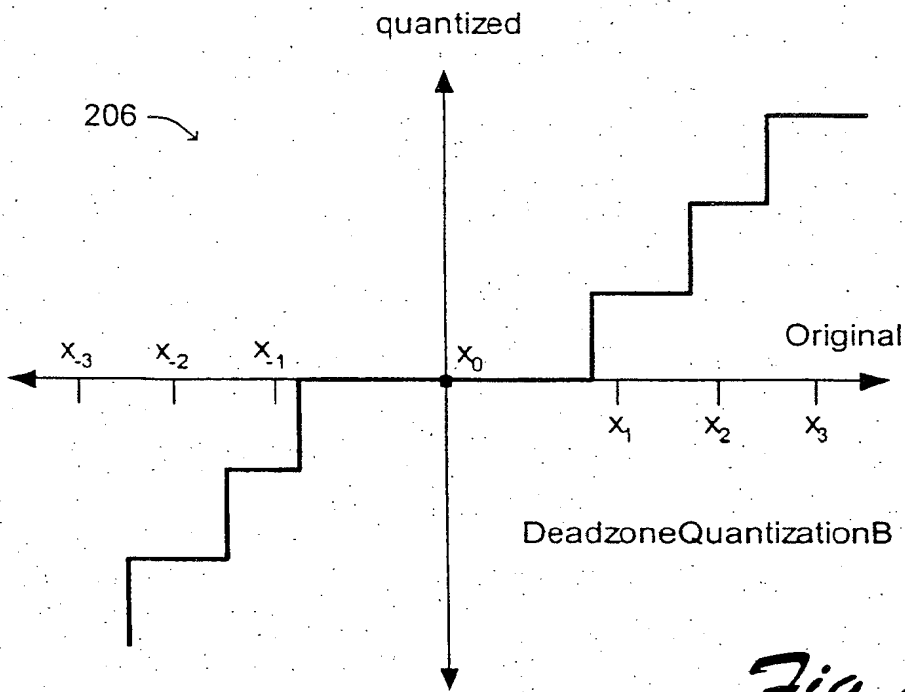


Fig. 2(c)

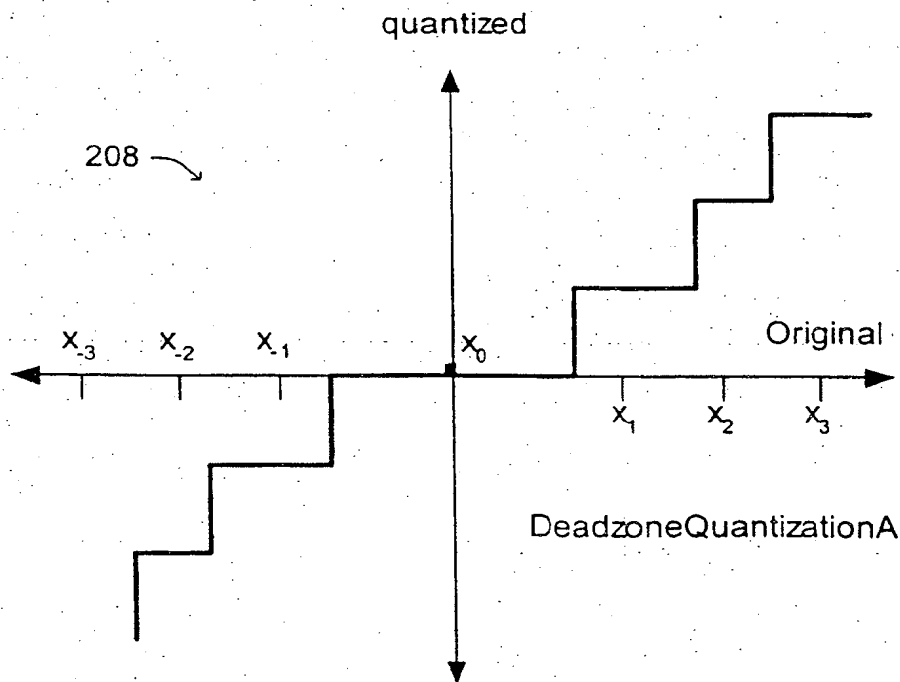
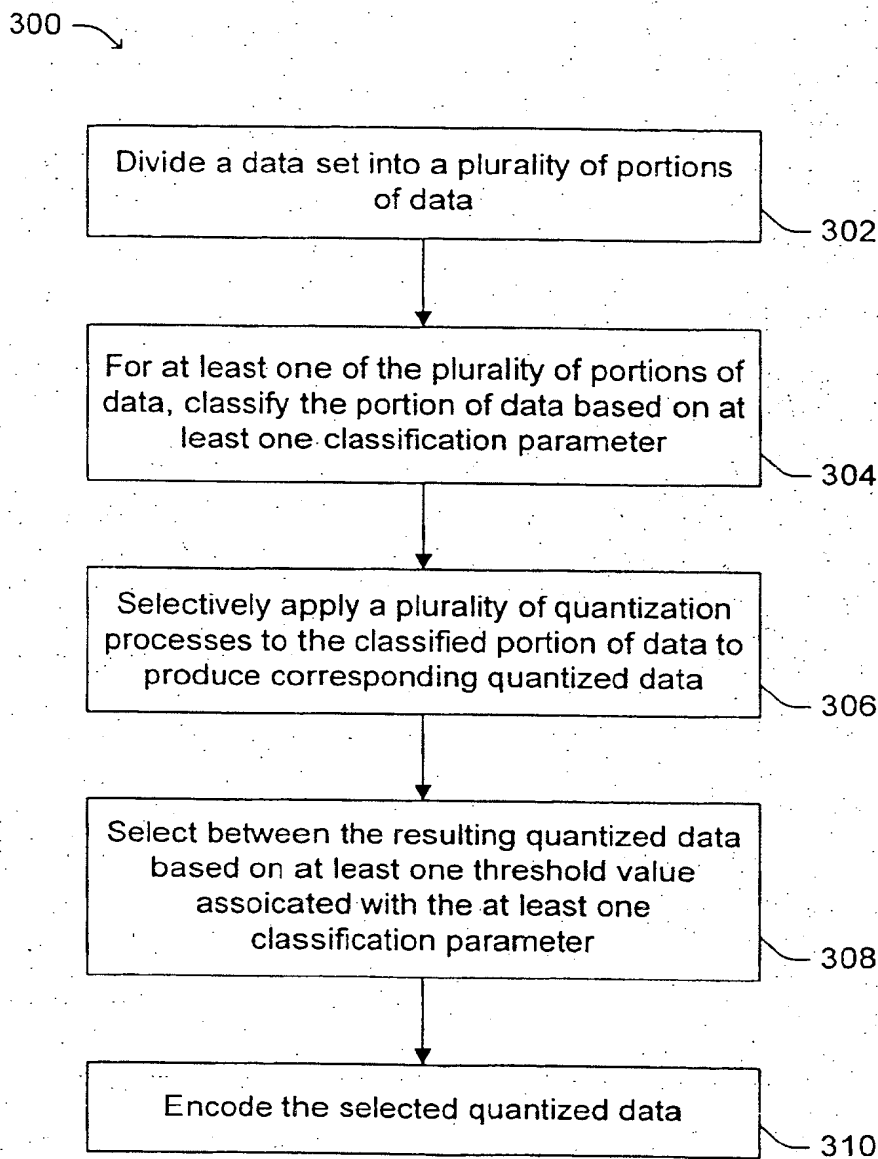
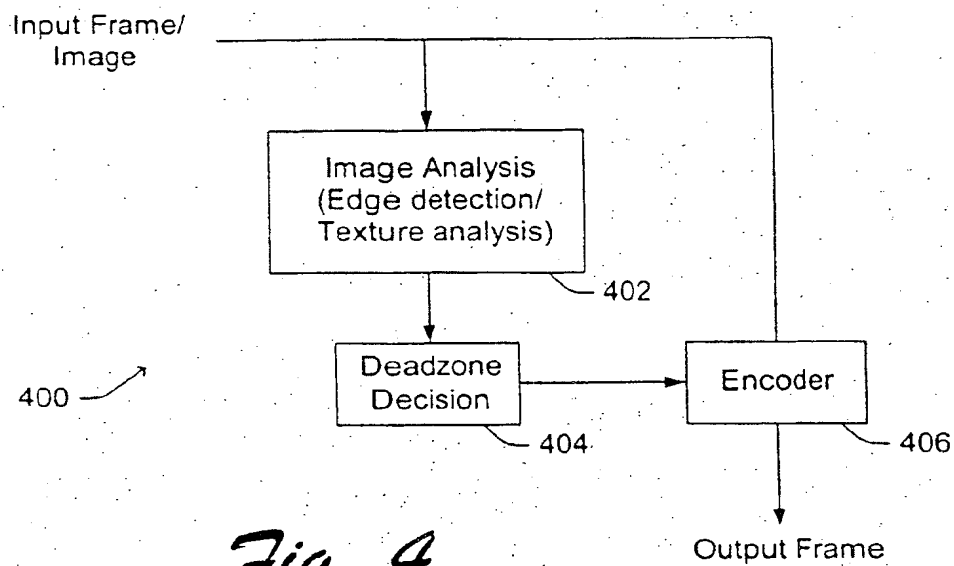
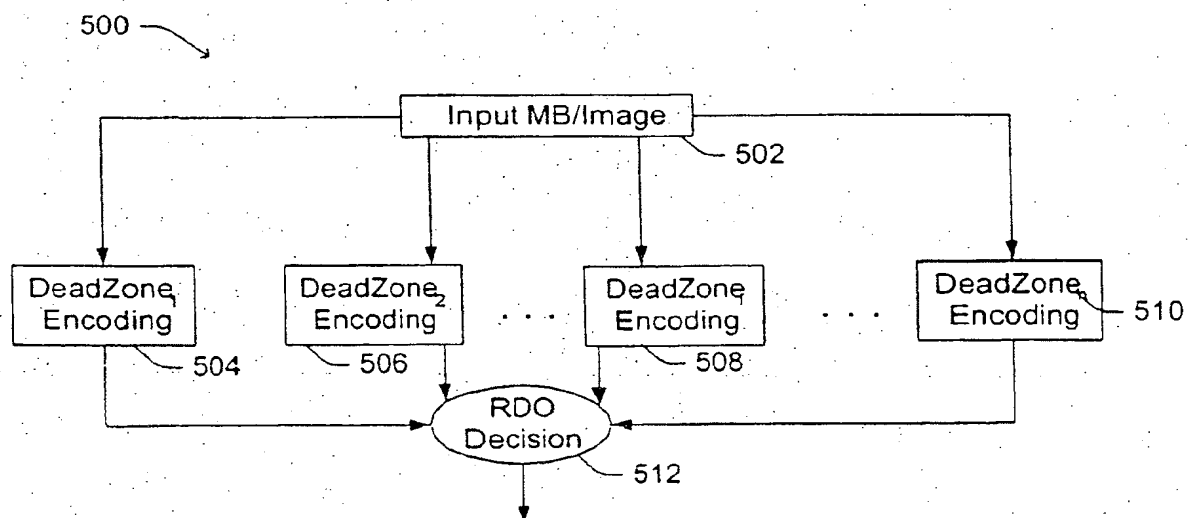


Fig. 2(d)

*Fig. 3*

*Fig. 4**Fig. 5*

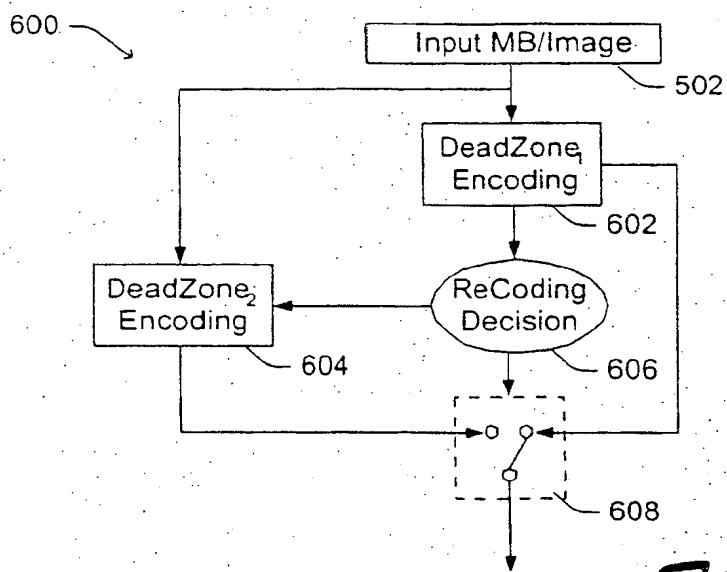


Fig. 6(a)

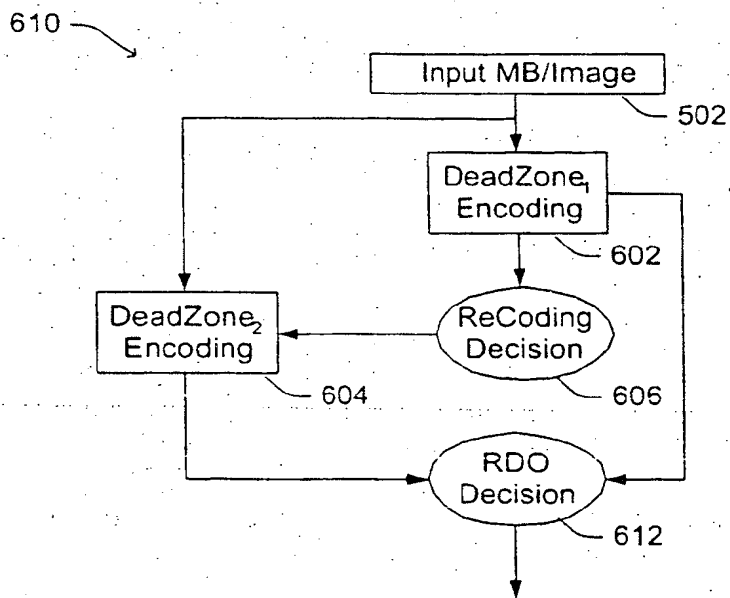


Fig. 6(b)

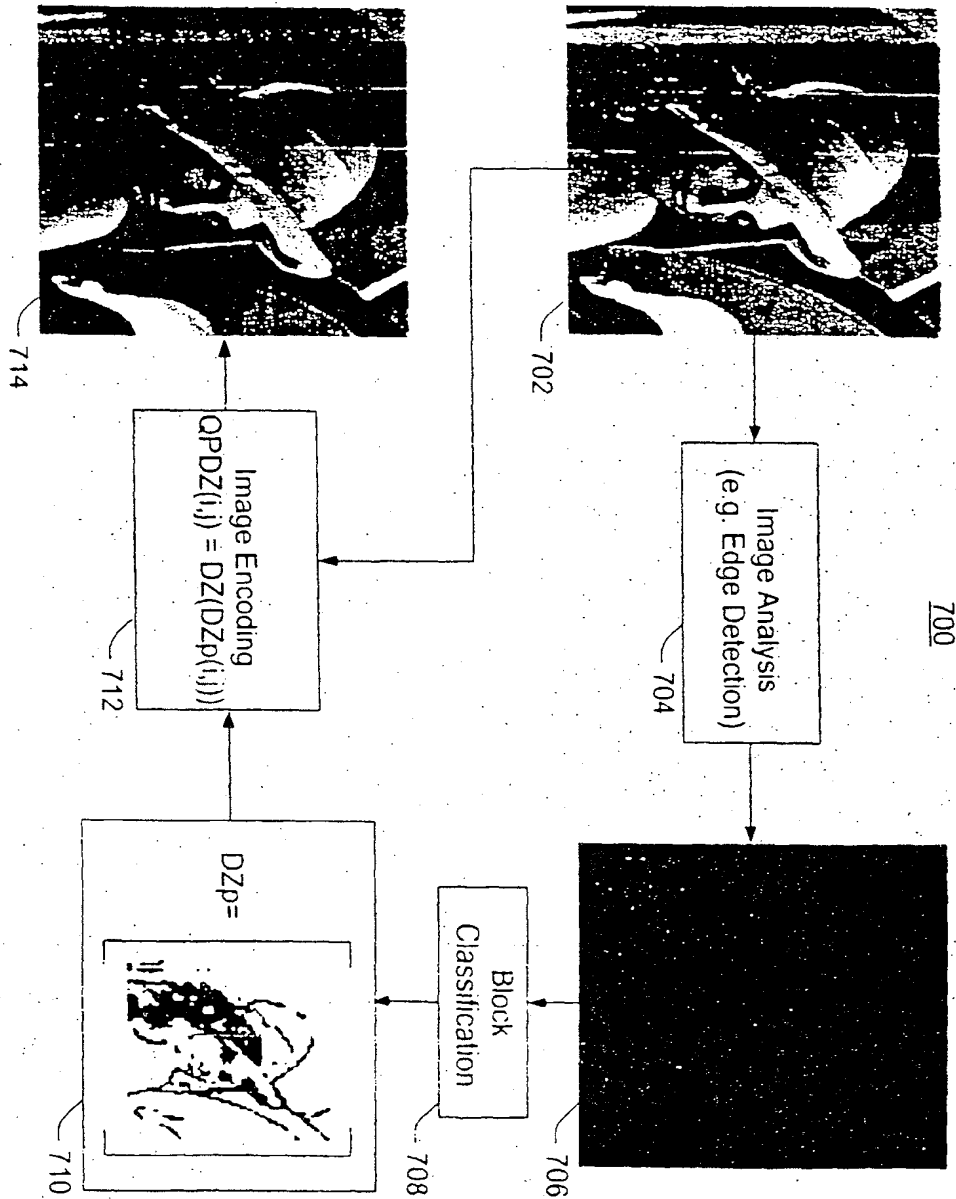
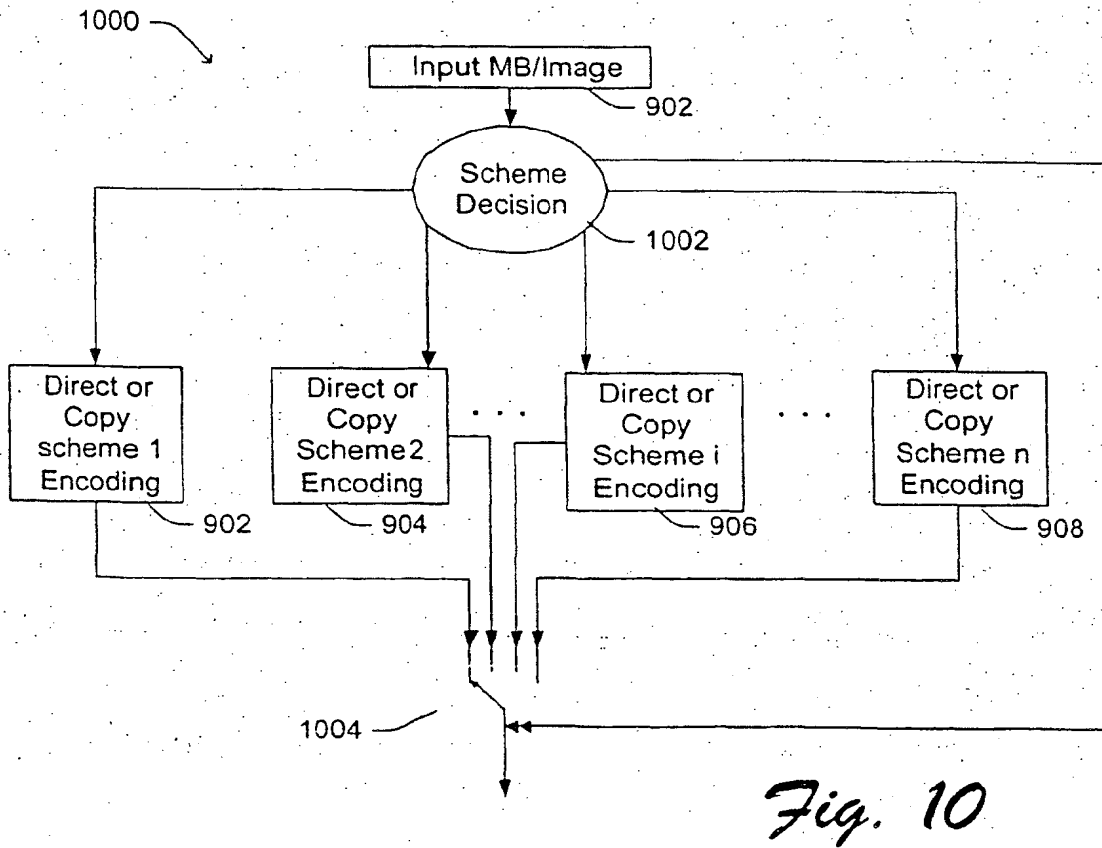
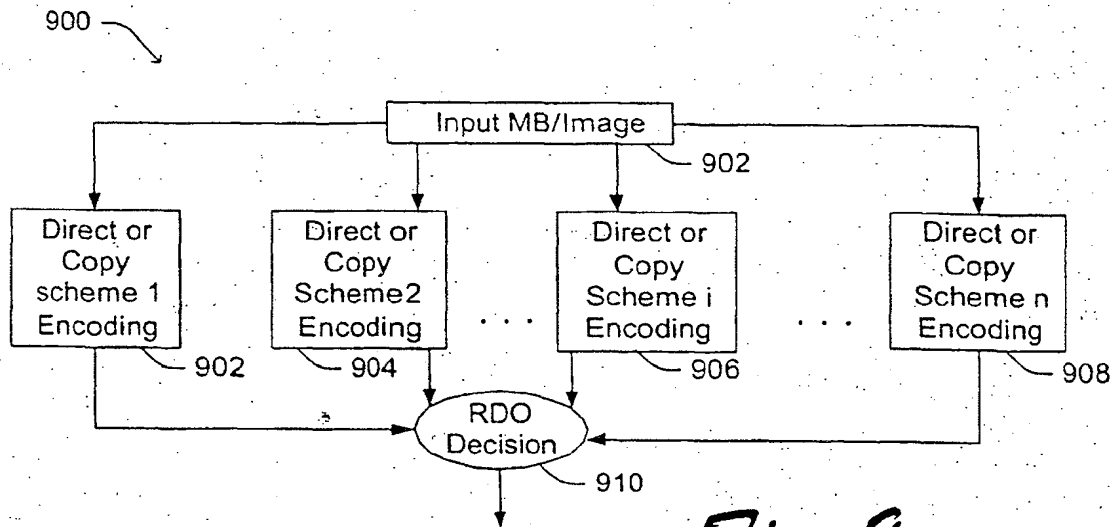


Fig. 7

800

picture layer rbsp() {	Category	Descriptor
picture structure	3	e(v)
frame num	3	u(v)
rps layer()		
if(coding_type() == Inter) {		
copy mv spatial		u(n) or e(v)
}		
if(coding_type() == Bipred) {		
direct mv spatial		u(n) or e(v)
if(direct mv spatial) {		
direct mv scale fwd	3	e(v)
direct mv scale bwd	3	e(v)
direct mv scale divisor	3	e(v)
}		
explicit B prediction block weight indication		e(v)
if(explicit B prediction block weight indication > 1)		
adaptive B prediction coeff table()		
}		
rbsp_trailing_bits()		
}		

Fig. 8



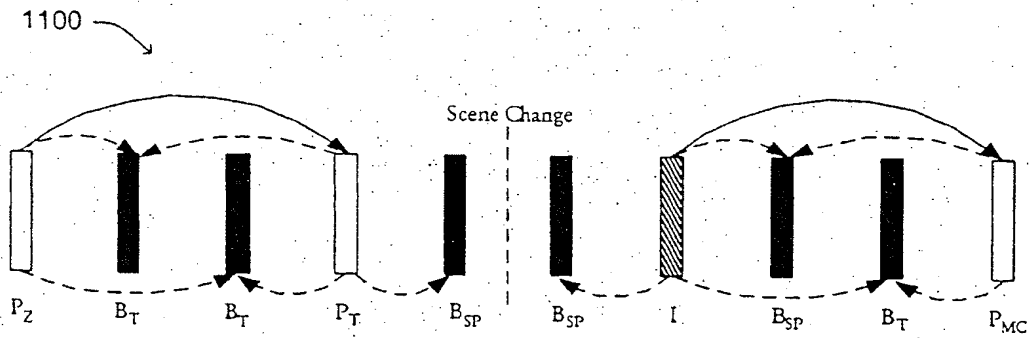


Fig. 11

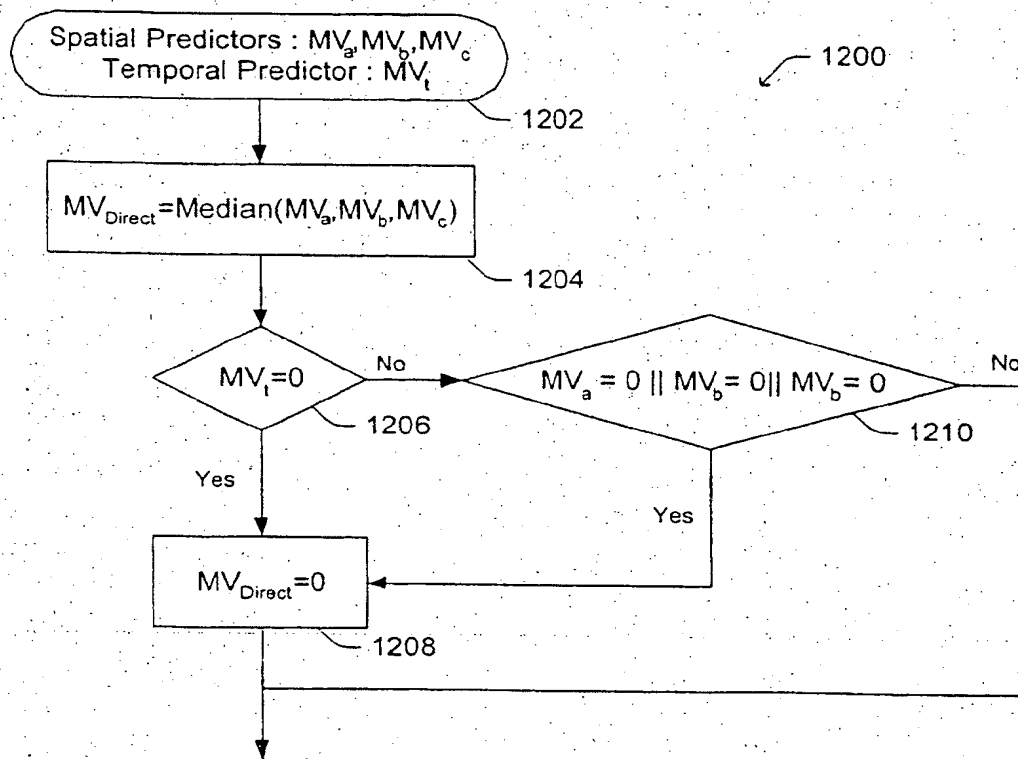


Fig. 12

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 379 090 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
22.06.2005 Bulletin 2005/25

(51) Int Cl.7: H04N 7/26

(43) Date of publication A2:
07.01.2004 Bulletin 2004/02

(21) Application number: 03013967.9

(22) Date of filing: 20.06.2003

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

- Li, Shipeng
Irvine, CA 92618 (US)
- Wu, Feng
Beijing 100080 (CN)
- Sullivan, Gary J.
Redmond, WA 98052 (US)

(30) Priority: 05.07.2002 US 393894 P

(71) Applicant: MICROSOFT CORPORATION
Redmond, Washington 98052-6399 (US)


(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(72) Inventors:
• Tourapis, Alexandros
West Windsor, NJ 08550 (US)

(54) Improved optimization techniques for data compression

(57) Methods and apparatuses are provided relating to the encoding of data, such as, e.g., images, video, etc. For example, certain methods include processing at least a portion of data using a plurality of different quantization functions to produce a plurality of corresponding quantized portions of data, and selectively outputting one of the quantized portions of data based on at least one threshold value. The method may also include dividing initial data into a plurality of portions and

classifying the portion of data based on at least one classification characteristic. Here, for example, there may be a threshold value that is associated with the classification characteristic. Additional syntax may be adopted to enable considerably higher compression efficiency by allowing several alternative motion prediction cases. A high efficiency time stamp independent Direct Mode is also provided which considers spatial motion vector prediction as well with stationary temporal predictors.

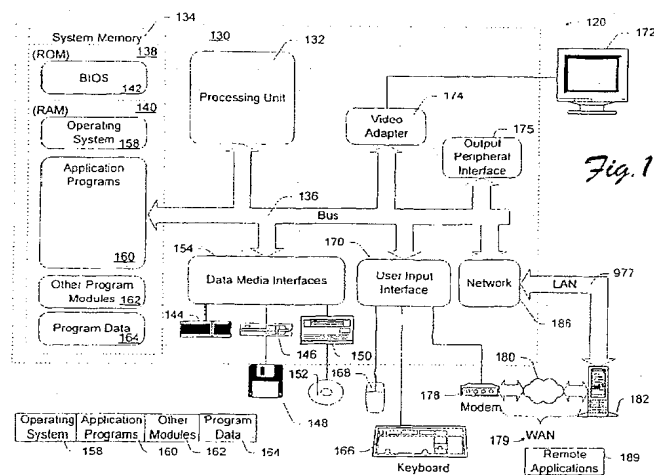



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 3967

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 01/56298 A (QUALCOMM INC) 2 August 2001 (2001-08-02) * page 15, line 3 - page 16, line 30 * * page 18, line 14 - page 19, line 3 * * figures 1,2,6,7A *	1-19, 46-58, 77-85	H04N7/26
X	US 5 734 755 A (YU YANBIN ET AL) 31 March 1998 (1998-03-31) * column 2, line 49 - line 55 * * column 3, line 46 - column 8, line 16 * * figure 1 *	1-19, 32-36, 46-58, 68, 77-85,90	
X	EP 0 555 016 A (AMERICAN TELEPHONE & TELEGRAPH) 11 August 1993 (1993-08-11) * page 3, line 29 - page 5, line 2 * * page 7, line 27 - page 9, line 9 * * figure 10 *	1-21, 46-61, 77-86	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	EP 0 959 628 A (IBM) 24 November 1999 (1999-11-24) * page 8, paragraph 50 - page 9, paragraph 54 * * page 11, paragraph 65 - page 16, paragraph 92 * * claims 1-4 * * figures 6,11,15 *	1-11, 16-19, 46-52, 56-58, 77-80, 83-85	H04N
X		12-15, 53-55, 81,82	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 April 2005	Examiner Kuhn, P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

4 EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 3967

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	INTERNATIONAL ORGANIZATION FOR STANDARDIZATION = ORGANISATION INTERNATIONALE DE NORMALISATION: "TEST MODEL 5" MPEG TEST MODEL 5. ISO-IEC/JTC1/SC29/WG11/N0400. CODED REPRESENTATION OF PICTURE AND AUDIO INFORMATION. DOCUMENT AVC-4918, VERSION 2: APRIL 1993, GENEVA, ISO, CH, 1993, pages 1-119, XP001150695 * page 54 - page 57 * * paragraphs '0005!', '0006!' *	1-11, 16-19, 46-52, 56-58, 77-80, 83-85	
X		12-15, 37-42, 53-55, 69-73, 81,82, 91-93	
A	US 5 724 453 A (LIVNY MIRON ET AL) 3 March 1998 (1998-03-03) * column 2, line 54 - column 10, line 54 *	1-94	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	REUSENS E ET AL: "DYNAMIC APPROACH TO VISUAL DATA COMPRESSION" IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, IEEE INC. NEW YORK, US, vol. 7, no. 1, 1 February 1997 (1997-02-01), pages 197-210, XP000678891 ISSN: 1051-8215 * page 197 - page 203 *	22-31, 62-67, 87-89	
X		32-36, 68,90	
----- -/--			
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 April 2005	Examiner Kuhn, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P/C/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 3967

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 01/11893 A (SONY ELECTRONICS INC) 15 February 2001 (2001-02-15) * page 11, line 14 - page 13, line 36 *	1-94	
A	US 6 125 147 A (LI SHIPENG ET AL) 26 September 2000 (2000-09-26) * column 4, line 55 - column 12, line 43 *	1-94	
A	MARCELLIN M W ET AL: "An overview of quantization in JPEG 2000" SIGNAL PROCESSING. IMAGE COMMUNICATION, ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, NL, vol. 17, no. 1, January 2002 (2002-01), pages 73-84, XP004326799 ISSN: 0923-5965 * paragraphs '02.1!', '03.3!; figures 1-3 *	19-21, 59-61,86	
X		1-11, 16-19, 46-52, 56-58, 77-80, 83-85	
X	"TEXT OF COMMITTEE DRAFT OF JOINT VIDEO SPECIFICATION (ITU-T REC. H-264 ISO/IEC 14496-10 AVC) MPEG02/N4810" ISO/IEC JTC1/SC29/WG11 MPEG02/N4810, FAIRFAX,, US, May 2002 (2002-05), pages I-X,1, XP001074690 * paragraphs '0001!, '0007!, '08.4!, '08.5!, '09.2!, '09.3!, '0011! *	37-45, 69-76, 91-94	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 April 2005	Examiner Kuhn, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)



European Patent
Office

Application Number

EP 03 01 3967

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 03 01 3967

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-11, 16-19, 46-52, 56-58, 77-80, 83-85

relate to a method and apparatus for:

- a) processing at least a portion of data using a plurality of quantization functions, and
- b) outputting one of said quantized portions of data based on at least one threshold value.

2. claims: 12-15, 53-55, 81, 82

relate to a method and apparatus for:

- a) analysing image characteristics,
- b) selecting adaptive quantization, and
- c) encoding of the image.

3. claims: 19-21, 59-61, 86

relate to a method and apparatus for:

- a) analysing image characteristics,
- b) including Deadzone quantization,
- c) performing block classification based on image analysis, and
- d) encoding of the image.

4. claims: 22-31, 62-67, 87-89

relate to a method and apparatus for:

- a) encoding at least a portion of video image using at least two different encoders,
- b) where at least one encoder includes a Deadzone quantizer configured to support a Non Residual Mode, and
- c) identifying preferred encoded data of the output of said at least two encoders based on a Rate Distortion Optimization.

5. claims: 32-36, 68, 90

relate to a method and apparatus for:

- a) varying at least one Lagrangian multiplier,
- b) where Lagrangian multiplier is operatively configuring encoding logic,
- c) encoding logic has a quantization function, and
- d) encoding said image data using said encoding logic.

6. claims: 37-42, 69-73, 91-93



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 03 01 3967

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

- relate to a method and apparatus for:
- a) encoding video data, and
 - b) encoder selectively outputs syntax information identifying a type of motion vector prediction.
-

7. claims: 43-45, 74-76, 94

- relate to a method and apparatus for:
- a) encoding video considering temporal or spatial stationary portions of video frames,
 - b) selectively applying spatial prediction of motion, and
 - c) conditionally setting spatial prediction of motion to zero.
-

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 3967

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-04-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0156298	A	02-08-2001	US 6600836 B1	29-07-2003
			AU 3460701 A	07-08-2001
			CA 2398386 A1	02-08-2001
			CN 1419787 A	21-05-2003
			EP 1252773 A1	30-10-2002
			JP 2003521178 T	08-07-2003
			MX PA02007274 A	12-02-2003
			NZ 520291 A	25-06-2004
			TW 517501 B	11-01-2003
			WO 0156298 A1	02-08-2001
			US 2003202707 A1	30-10-2003
			ZA 200205897 A	05-11-2003
US 5734755	A	31-03-1998	CA 2118880 A1	12-09-1995
EP 0555016	A	11-08-1993	CA 2088082 A1	08-08-1993
			DE 69322531 D1	28-01-1999
			DE 69322531 T2	24-06-1999
			EP 0555016 A2	11-08-1993
			JP 2915238 B2	05-07-1999
			JP 6046403 A	18-02-1994
			US 5309232 A	03-05-1994
			US 5481308 A	02-01-1996
EP 0959628	A	24-11-1999	US 5231484 A	27-07-1993
			EP 0959627 A2	24-11-1999
			EP 0959628 A2	24-11-1999
			CA 2077058 A1	09-05-1993
			CN 1072554 A ,C	26-05-1993
			DE 69230704 D1	30-03-2000
			DE 69230704 T2	31-08-2000
			DE 69233411 D1	21-10-2004
			EP 0540961 A2	12-05-1993
			JP 2818340 B2	30-10-1998
			JP 5252507 A	28-09-1993
			KR 9607264 B1	29-05-1996
US 5724453	A	03-03-1998	NONE	
WO 0111893	A	15-02-2001	US 6408026 B1	18-06-2002
			AU 7054400 A	05-03-2001
			WO 0111893 A1	15-02-2001
US 6125147	A	26-09-2000	BR 9910272 A	02-01-2001
			CN 1301370 A	27-06-2001
			DE 69915277 D1	08-04-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 3967

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-04-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6125147 A		DE 69915277 T2	03-02-2005
		EP 1076885 A1	21-02-2001
		JP 2002514023 T	14-05-2002
		WO 9957685 A1	11-11-1999
		BR 9910264 A	02-10-2001
		BR 9910270 A	02-10-2001
		CN 1302419 A	04-07-2001
		CN 1369175 A	11-09-2002
		DE 69909364 D1	14-08-2003
		DE 69909364 T2	09-06-2004
		DE 69909880 D1	04-09-2003
		DE 69909880 T2	03-06-2004
		DE 69924102 D1	14-04-2005
		EP 0955607 A2	10-11-1999
		EP 0955608 A1	10-11-1999
		EP 0955609 A1	10-11-1999
		EP 1076884 A1	21-02-2001
		EP 1078529 A1	28-02-2001
		JP 2000059795 A	25-02-2000
		JP 2000050274 A	18-02-2000
		JP 2000032463 A	28-01-2000
		JP 2002514022 T	14-05-2002
		JP 2002514867 T	21-05-2002
		TW 440804 B	16-06-2001
		TW 420935 B	01-02-2001
		TW 424389 B	01-03-2001
		TW 416221 B	21-12-2000
		WO 9957684 A1	11-11-1999
		WO 9957908 A1	11-11-1999
		US 6374280 B1	16-04-2002
		US 6310919 B1	30-10-2001
		US 6792149 B1	14-09-2004
		US 6704358 B1	09-03-2004
		US 6222944 B1	24-04-2001

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82